


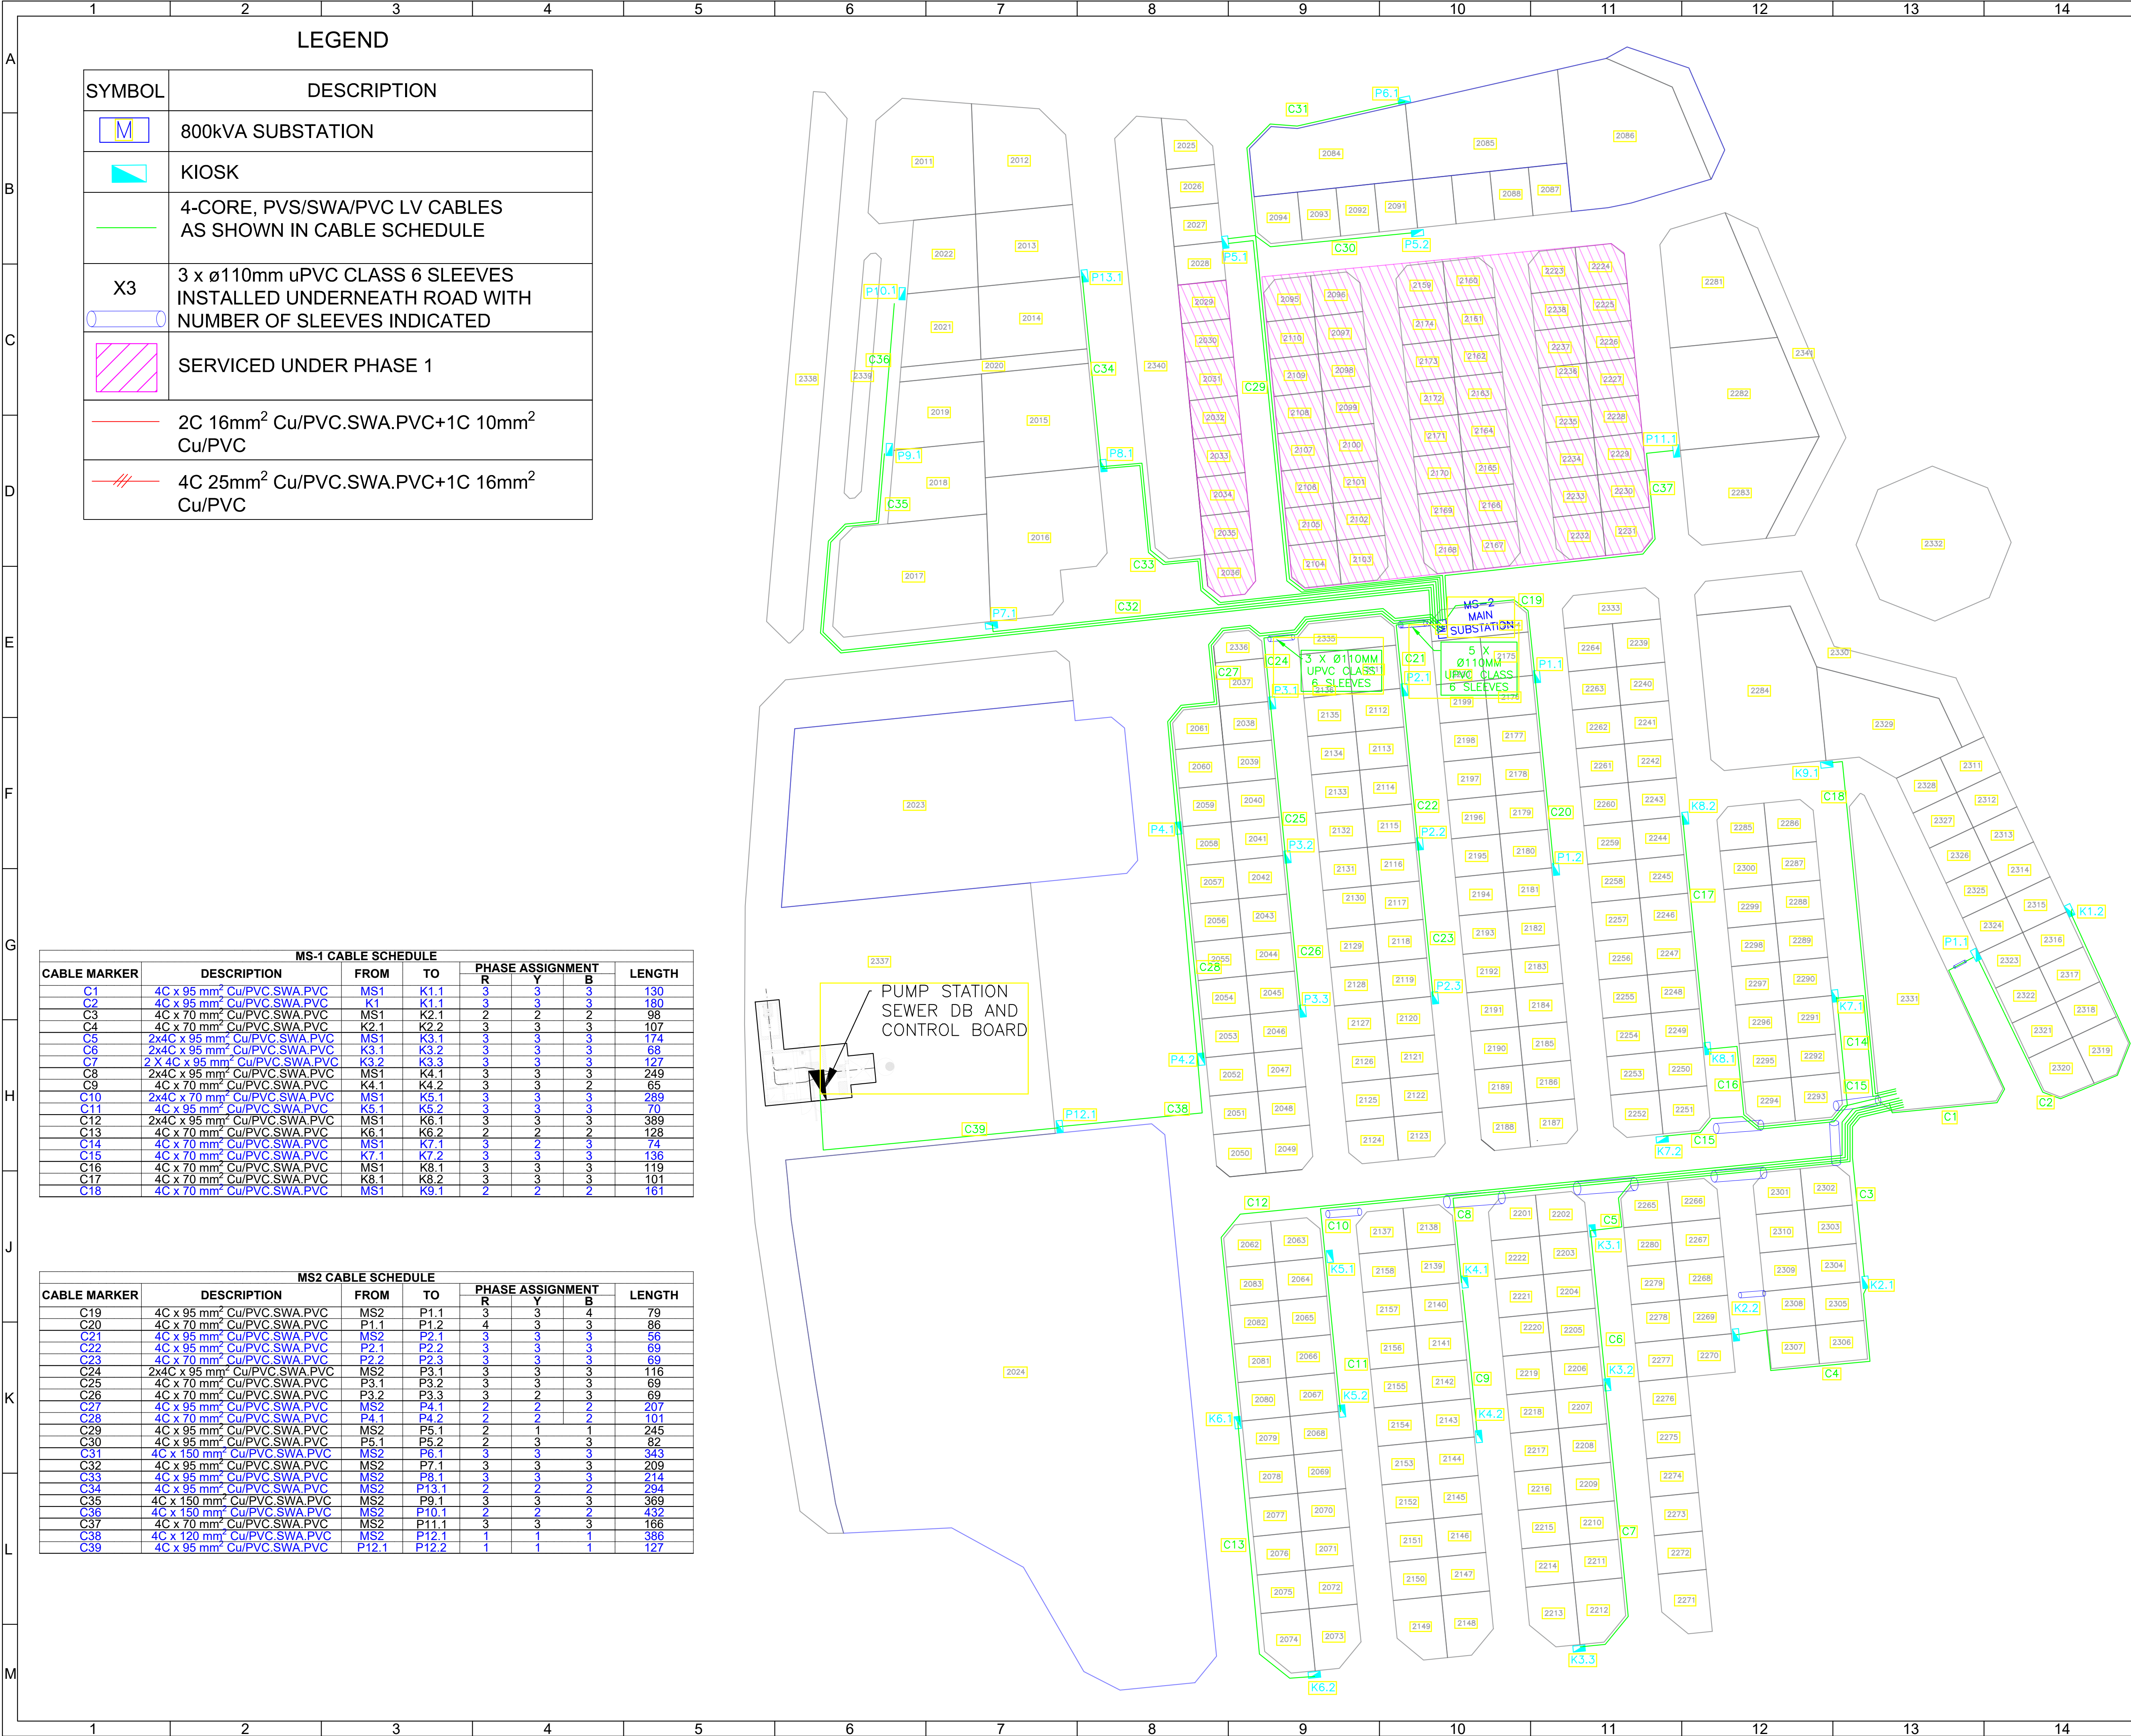

| LEGEND |                                                                                            |
|--------|--------------------------------------------------------------------------------------------|
| SYMBOL | DESCRIPTION                                                                                |
|        | 800kVA SUBSTATION                                                                          |
|        | KIOSK                                                                                      |
|        | 4-CORE, PVS/SWA/PVC LV CABLES AS SHOWN IN CABLE SCHEDULE                                   |
|        | 3 x Ø110mm uPVC CLASS 6 SLEEVES INSTALLED UNDERNEATH ROAD WITH NUMBER OF SLEEVES INDICATED |
|        | SERVICED UNDER PHASE 1                                                                     |
|        | 2C 16mm <sup>2</sup> Cu/PVC.SWA.PVC+1C 10mm <sup>2</sup> Cu/PVC                            |
|        | 4C 25mm <sup>2</sup> Cu/PVC.SWA.PVC+1C 16mm <sup>2</sup> Cu/PVC                            |

| MS-1 CABLE SCHEDULE |                                            |      |      |                  |   |   |        |
|---------------------|--------------------------------------------|------|------|------------------|---|---|--------|
| CABLE MARKER        | DESCRIPTION                                | FROM | TO   | PHASE ASSIGNMENT |   |   | LENGTH |
|                     |                                            |      |      | R                | Y | B |        |
| C1                  | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC     | MS1  | K1.1 | 3                | 3 | 3 | 130    |
| C2                  | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC     | K1   | K1.1 | 3                | 3 | 3 | 180    |
| C3                  | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC     | MS1  | K2.1 | 2                | 2 | 2 | 98     |
| C4                  | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC     | K2.1 | K2.2 | 3                | 3 | 3 | 107    |
| C5                  | 2x4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | MS1  | K3.1 | 3                | 3 | 3 | 174    |
| C6                  | 2x4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | K3.1 | K3.2 | 3                | 3 | 3 | 68     |
| C7                  | 2 X 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC | K3.2 | K3.3 | 3                | 3 | 3 | 127    |
| C8                  | 2x4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | MS1  | K4.1 | 3                | 3 | 3 | 249    |
| C9                  | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC     | K4.1 | K4.2 | 3                | 3 | 2 | 65     |
| C10                 | 2x4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC   | MS1  | K5.1 | 3                | 3 | 3 | 289    |
| C11                 | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC     | K5.1 | K5.2 | 3                | 3 | 3 | 70     |
| C12                 | 2x4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | MS1  | K6.1 | 3                | 3 | 3 | 389    |
| C13                 | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC     | K6.1 | K6.2 | 2                | 2 | 2 | 128    |
| C14                 | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC     | MS1  | K7.1 | 3                | 2 | 3 | 74     |
| C15                 | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC     | K7.1 | K7.2 | 3                | 3 | 3 | 136    |
| C16                 | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC     | MS1  | K8.1 | 3                | 3 | 3 | 119    |
| C17                 | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC     | K8.1 | K8.2 | 3                | 3 | 3 | 101    |
| C18                 | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC     | MS1  | K9.1 | 2                | 2 | 2 | 161    |

| MS2 CABLE SCHEDULE |                                          |       |       |                  |   |   |        |
|--------------------|------------------------------------------|-------|-------|------------------|---|---|--------|
| CABLE MARKER       | DESCRIPTION                              | FROM  | TO    | PHASE ASSIGNMENT |   |   | LENGTH |
|                    |                                          |       |       | R                | Y | B |        |
| C19                | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | MS2   | P1.1  | 3                | 3 | 4 | 79     |
| C20                | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC   | P1.1  | P1.2  | 4                | 3 | 3 | 86     |
| C21                | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | MS2   | P2.1  | 3                | 3 | 3 | 56     |
| C22                | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | P2.1  | P2.2  | 3                | 3 | 3 | 69     |
| C23                | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC   | P2.2  | P2.3  | 3                | 3 | 3 | 69     |
| C24                | 2x4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC | MS2   | P3.1  | 3                | 3 | 3 | 116    |
| C25                | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC   | P3.1  | P3.2  | 3                | 3 | 3 | 69     |
| C26                | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC   | P3.2  | P3.3  | 3                | 2 | 3 | 69     |
| C27                | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | MS2   | P4.1  | 2                | 2 | 2 | 207    |
| C28                | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC   | P4.1  | P4.2  | 2                | 2 | 2 | 101    |
| C29                | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | MS2   | P5.1  | 2                | 1 | 1 | 245    |
| C30                | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | P5.1  | P5.2  | 2                | 3 | 3 | 82     |
| C31                | 4C x 150 mm <sup>2</sup> Cu/PVC.SWA.PVC  | MS2   | P6.1  | 3                | 3 | 3 | 343    |
| C32                | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | MS2   | P7.1  | 3                | 3 | 3 | 209    |
| C33                | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | MS2   | P8.1  | 3                | 3 | 3 | 214    |
| C34                | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | MS2   | P13.1 | 2                | 2 | 2 | 294    |
| C35                | 4C x 150 mm <sup>2</sup> Cu/PVC.SWA.PVC  | MS2   | P9.1  | 3                | 3 | 3 | 369    |
| C36                | 4C x 150 mm <sup>2</sup> Cu/PVC.SWA.PVC  | MS2   | P10.1 | 2                | 2 | 2 | 432    |
| C37                | 4C x 70 mm <sup>2</sup> Cu/PVC.SWA.PVC   | MS2   | P11.1 | 3                | 3 | 3 | 166    |
| C38                | 4C x 120 mm <sup>2</sup> Cu/PVC.SWA.PVC  | MS2   | P12.1 | 1                | 1 | 1 | 366    |
| C39                | 4C x 95 mm <sup>2</sup> Cu/PVC.SWA.PVC   | P12.1 | P12.2 | 1                | 1 | 1 | 127    |

IMPORTANT  
CONTRACTOR TO CHECK AND VERIFY ALL DIMENSIONS AND LEVELS ON SITE PRIOR TO CONSTRUCTION. ANY DISCREPANCY TO BE REFERED TO THE ENGINEER AS SOON AS POSSIBLE UNDER NO CIRCUMSTANCES IS THIS DRAWING TO BE SCALED.

- GENERAL NOTES:
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL ARCHITECTS, ENGINEERS AND SPECIALISTS DRAWINGS WITH THE PROJECT SPECIFICATIONS WHERE APPLICABLE.
  - ALL ELECTRICAL WORKS SHALL COMPLY WITH THESE PLANS, SPECIFICATIONS AND APPLICABLE PROVISIONS OF THE LATEST EDITION OF THE SANS 10142, BS 7671, IEC 60364. THE RULES AND REGULATION OF THE LOCAL ENFORCING AUTHORITY AND THE REQUIREMENTS OF THE LOCAL POWER SUPPLY AUTHORITY. THE ELECTRICAL WORKS SHALL BE DONE UNDER THE IMMEDIATE SUPERVISION OF A DULY REGISTERED ELECTRICAL CONTRACTOR.
  - ALL DIMENSIONS AND LEVELS TO BE CHECKED ON SITE BEFORE ANY WORK IS PUT IN HAND.
  - ALL CABLE ROUTES AND CABLE LENGTHS SHALL BE VERIFIED ON SITE BEFORE CABLES ARE CUT TO LENGTH AND INSTALLED.
  - CABLES SHALL BE TAKEN DURING INSTALLATION OF POWER SUPPLY CABLES NOT TO CAUSE DAMAGE TO OTHER SERVICES INSTALLED IN THE SAME AREA AS POWER SUPPLY CABLES.
  - CABLES SHALL BE INSTALLED IN SLEEVES WHERE POWER SUPPLY CABLES CROSS OTHER SERVICES. TWO SPARE SLEEVES SHALL BE INSTALLED AT ALL CROSSINGS.
  - ELECTRICAL DANGER TAPE SHALL BE INSTALLED OVER ALL POWER SUPPLY CABLES.

| REVISIONS |             |      |    |
|-----------|-------------|------|----|
| NO.       | DESCRIPTION | DATE | BY |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |

CLIENT:  
HENTIS BAY MUNICIPALITY  
P.O.BOX 61  
HENTIES BAY  
NAMIBIA  
TEL: +264 64 502000  
FAX: +264 64 502001

COPYRIGHT RESERVED

SIGNED: \_\_\_\_\_ DATE: \_\_\_\_\_

PROJECT MANAGERS AND ENGINEERS

CEPM & PARTNERS  
P.O.BOX 5891  
WINDHOEK  
NAMIBIA  
TEL: +264 61 259728  
FAX: +264 886554480  
E-mail: cepm1@iway.na

PROJECT TITLE

CONSTRUCTION OF ELECTRICAL SERVICES IN OMDEL EXTENSION 7 PHASE 2

DRAWING TITLE

LOW VOLTAGE RETICULATION LAYOUT

|        |            |          |       |         |          |
|--------|------------|----------|-------|---------|----------|
| SCALE  | PAPER SIZE | DESIGNED | DRAWN | CHECKED | P.E. No. |
| 1:1250 | A1         | G.I      | G.I   | P.U     | PE 26000 |

DRAWING NUMBER

2018-20-P2-103E


REVISION

DATE

PURPOSE FOR DRAWING

TENDER DRAWINGS



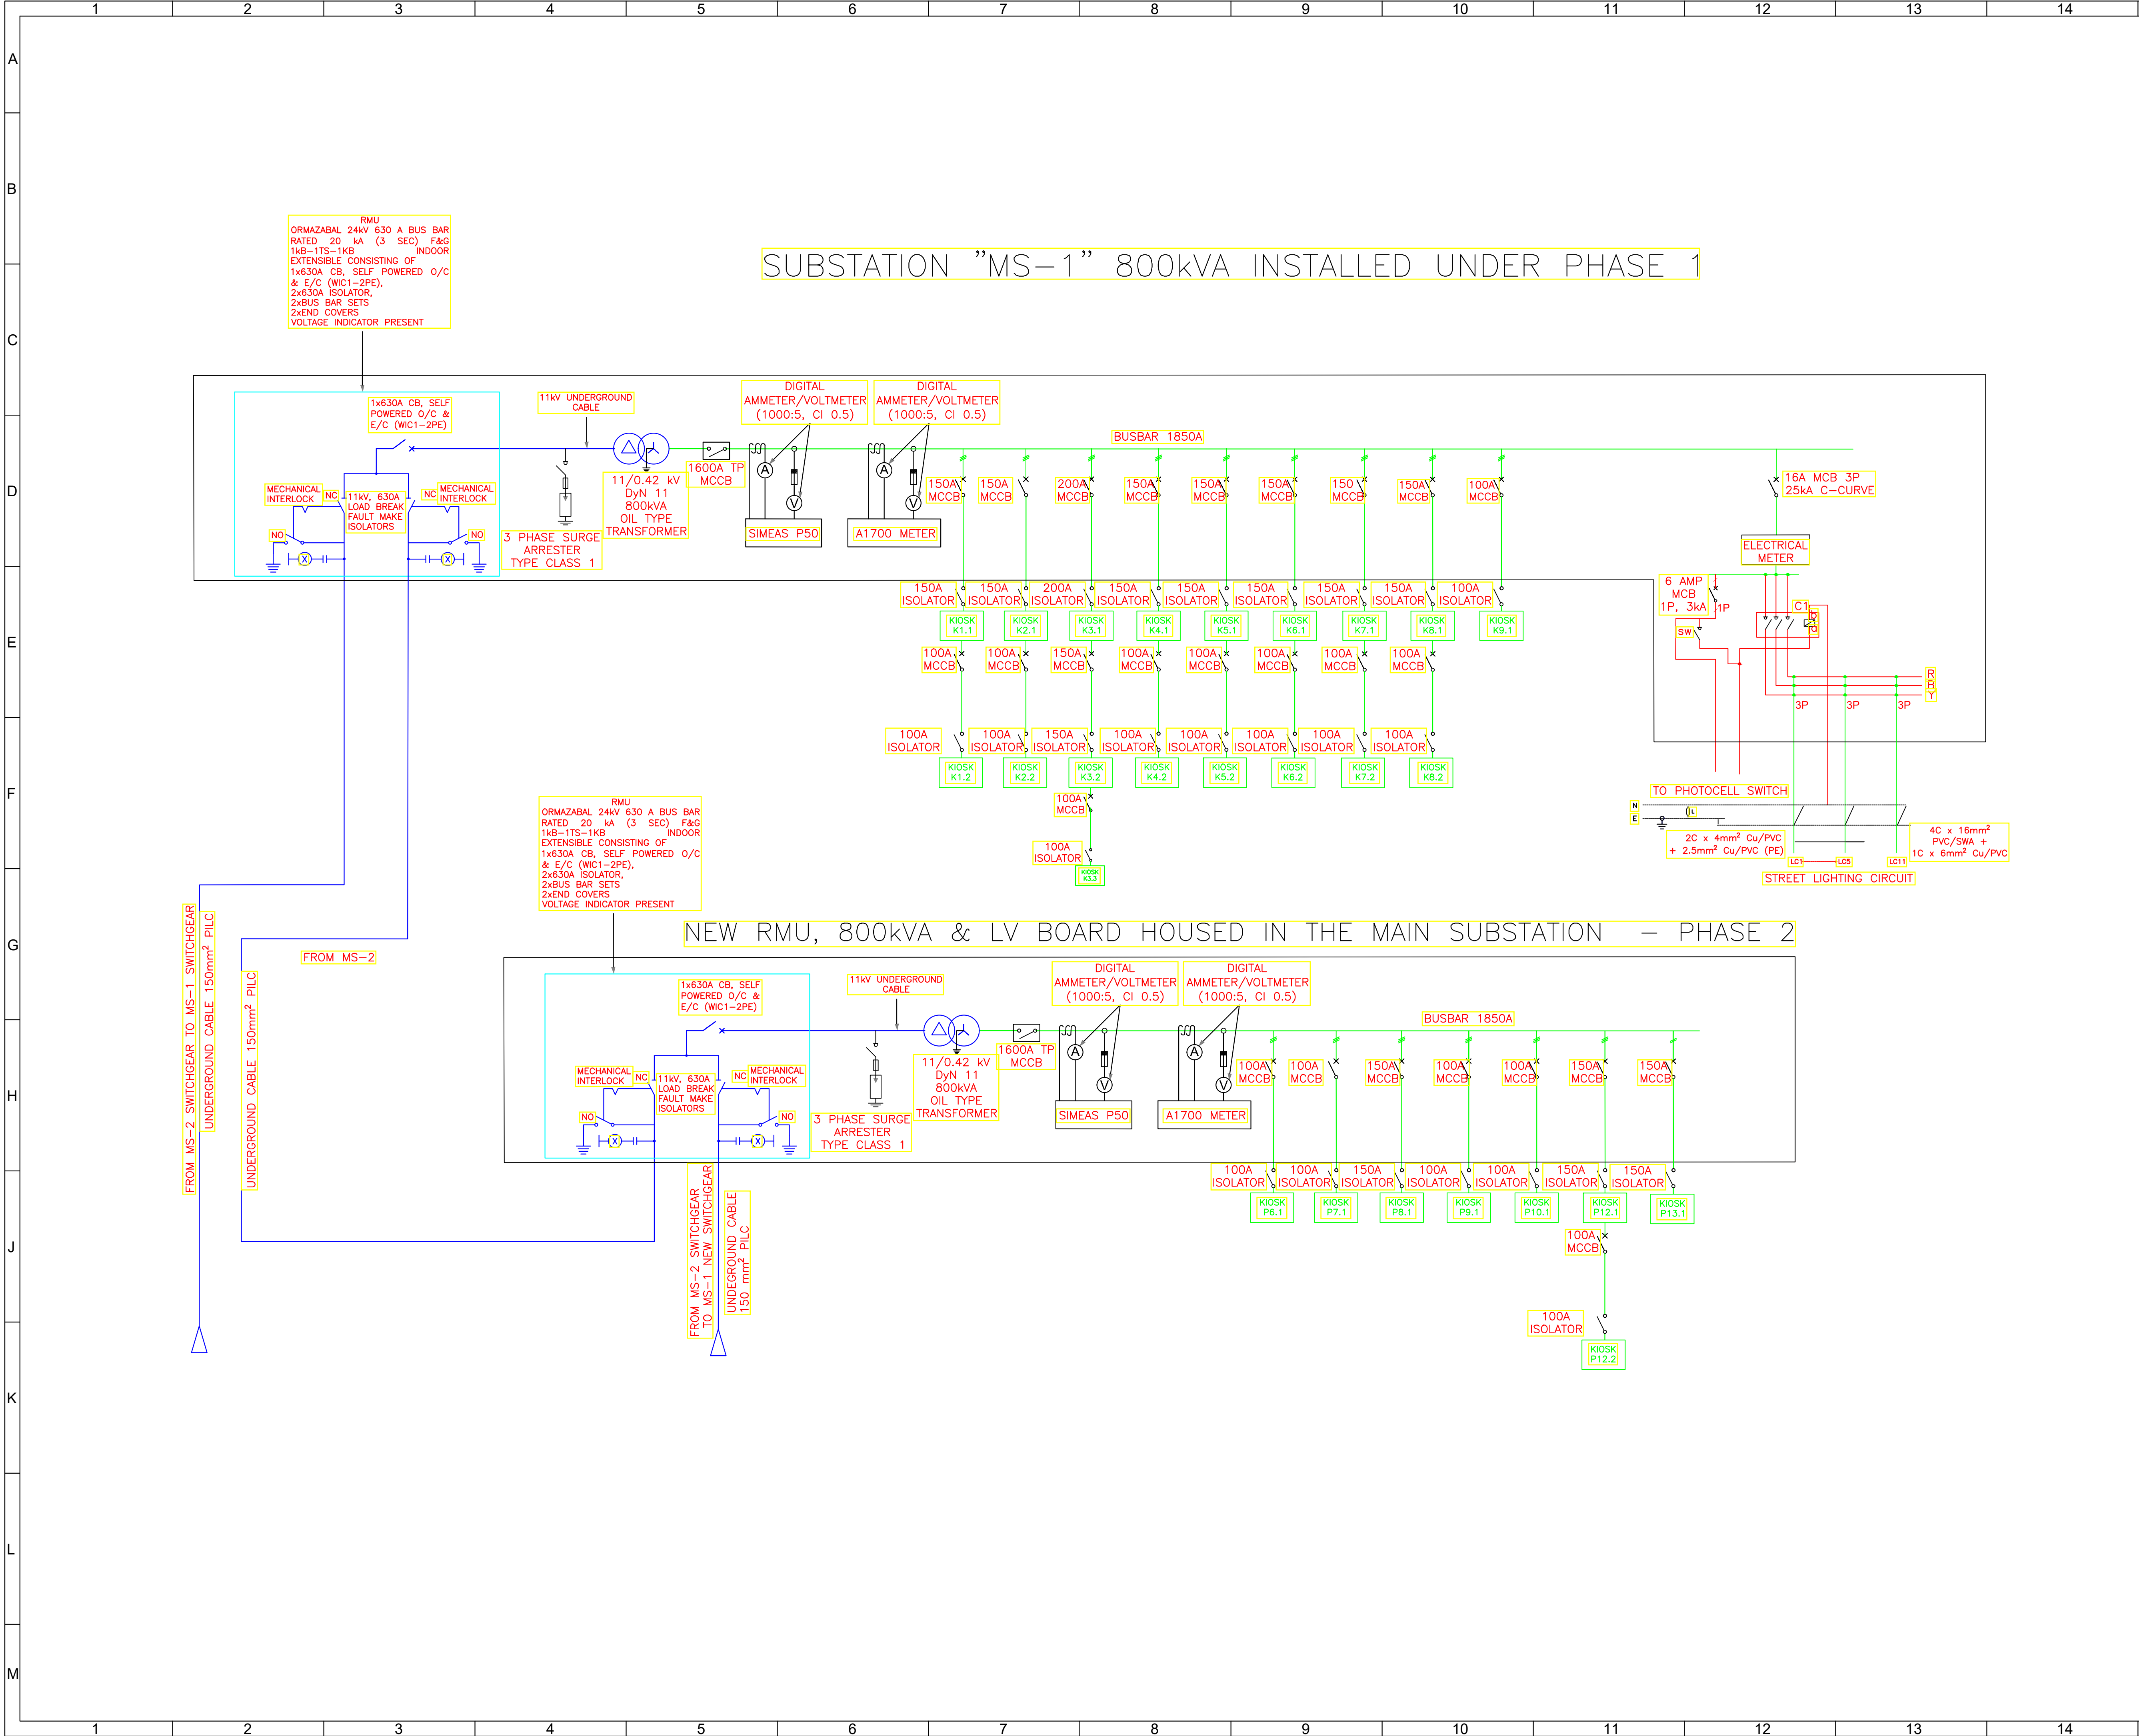

IMPORTANT  
CONTRACTOR TO CHECK AND VERIFY ALL DIMENSIONS AND LEVELS ON SITE PRIOR TO CONSTRUCTION. ANY DISCREPANCY TO BE REFERED TO THE ENGINEER AS SOON AS POSSIBLE UNDER NO CIRCUMSTANCES IS THIS DRAWING TO BE SCALED.

- GENERAL NOTES:
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL ARCHITECTS, ENGINEERS AND SPECIALISTS DRAWINGS WITH THE PROJECT SPECIFICATIONS WHERE APPLICABLE.
  - ALL ELECTRICAL WORKS SHALL COMPLY WITH THESE PLANS, SPECIFICATIONS AND APPLICABLE PROVISIONS OF THE LATEST EDITION OF THE SANS 10142, BS 7671, IEC 60364, THE RULES AND REGULATION OF THE LOCAL ENFORCING AUTHORITY AND THE REQUIREMENTS OF THE LOCAL POWER SUPPLY AUTHORITY. THE ELECTRICAL WORKS SHALL BE DONE UNDER THE IMMEDIATE SUPERVISION OF A DULY REGISTERED ELECTRICAL CONTRACTOR.
  - ALL DIMENSIONS AND LEVELS TO BE CHECKED ON SITE BEFORE ANY WORK IS PUT IN HAND.
  - ALL CABLE ROUTES AND CABLE LENGTHS SHALL BE VERIFIED ON SITE BEFORE CABLES ARE CUT TO LENGTH AND INSTALLED.
  - CARE SHALL BE TAKEN DURING INSTALLATION OF POWER SUPPLY CABLES NOT TO CAUSE DAMAGE TO OTHER SERVICES INSTALLED IN THE SAME AREA AS POWER SUPPLY CABLES.
  - CABLES SHALL BE INSTALLED IN A SLEEVE WHERE POWER SUPPLY CABLES CROSS OTHER SERVICES.
  - ELECTRICAL DANGER TAPE SHALL BE INSTALLED OVER ALL POWER SUPPLY CABLES INDICATED.
  - CABLES SHALL BE INSTALLED IN THE GROUND AND IN SLEEVES AS INDICATED ON THE DETAIL DRAWING.
  - POSITION AND NECESSITY TO BE DETERMINED ON SITE.
  - TO SUIT CONDUCTOR USED FOR TIE IN AND ERONGORED REGULATION.
  - MINIMUM CLEARANCE PHASE-PHASE: 580mm.
  - MINIMUM CLEARANCE PHASE-GROUND: 432.
  - MAXIMUM LENGTH BETWEEN TIE IN STRUCTURE & FIRST SPUR STRUCTURE: 50m
  - COMBINATION OF FLAT & CURVED WASHER ON ALL INSULATORS.
  - ALL EARTH MAT JOINTS TO BE OXY-ACETYLENE BRAZED USING 3mm SILBRALLOY BRAZING LODS, WITH WELDING SEAMS AT LEAST 7mm LONG.
  - WHERE AN EARTH CLAMP IS USED TO CLAMP TAILS TO EQUIPMENT, BOLT TORQUE OF 75 Nm IS TO BE USED.

| REVISIONS |             |      |    |
|-----------|-------------|------|----|
| NO.       | DESCRIPTION | DATE | BY |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |

CLIENT:  
HENTIS BAY MUNICIPALITY  
P.O.BOX 61  
HENTIES BAY  
NAMIBIA  
TEL: +264 64 502000  
FAX: +264 64 502001


COPYRIGHT RESERVED  
SIGNED: DATE:  
PROJECT MANAGERS AND ENGINEERS  
CEPM & PARTNERS  
P.O.BOX 5891  
WINDHOEK  
NAMIBIA  
TEL: +264 61 259728  
FAX: +264 886554480  
E-mail: cepm1@iway.na

PROJECT TITLE  
CONSTRUCTION OF ELECTRICAL SERVICES IN OMDEL EXTENSION 7 PHASE 2

DRAWING TITLE  
MS-1 SINGLE LINE DIAGRAM

| SCALE               | PAPER SIZE | DESIGNED | DRAWN | CHECKED  | P.E. No. |
|---------------------|------------|----------|-------|----------|----------|
| NTS                 | A1         | G.I      | G.I   | P.U      | PE 26000 |
| DRAWING NUMBER      |            |          |       | REVISION | DATE     |
| 2018-20-P2-101E     |            |          |       |          |          |
| PURPOSE FOR DRAWING |            |          |       |          |          |
| TENDER DRAWINGS     |            |          |       |          |          |



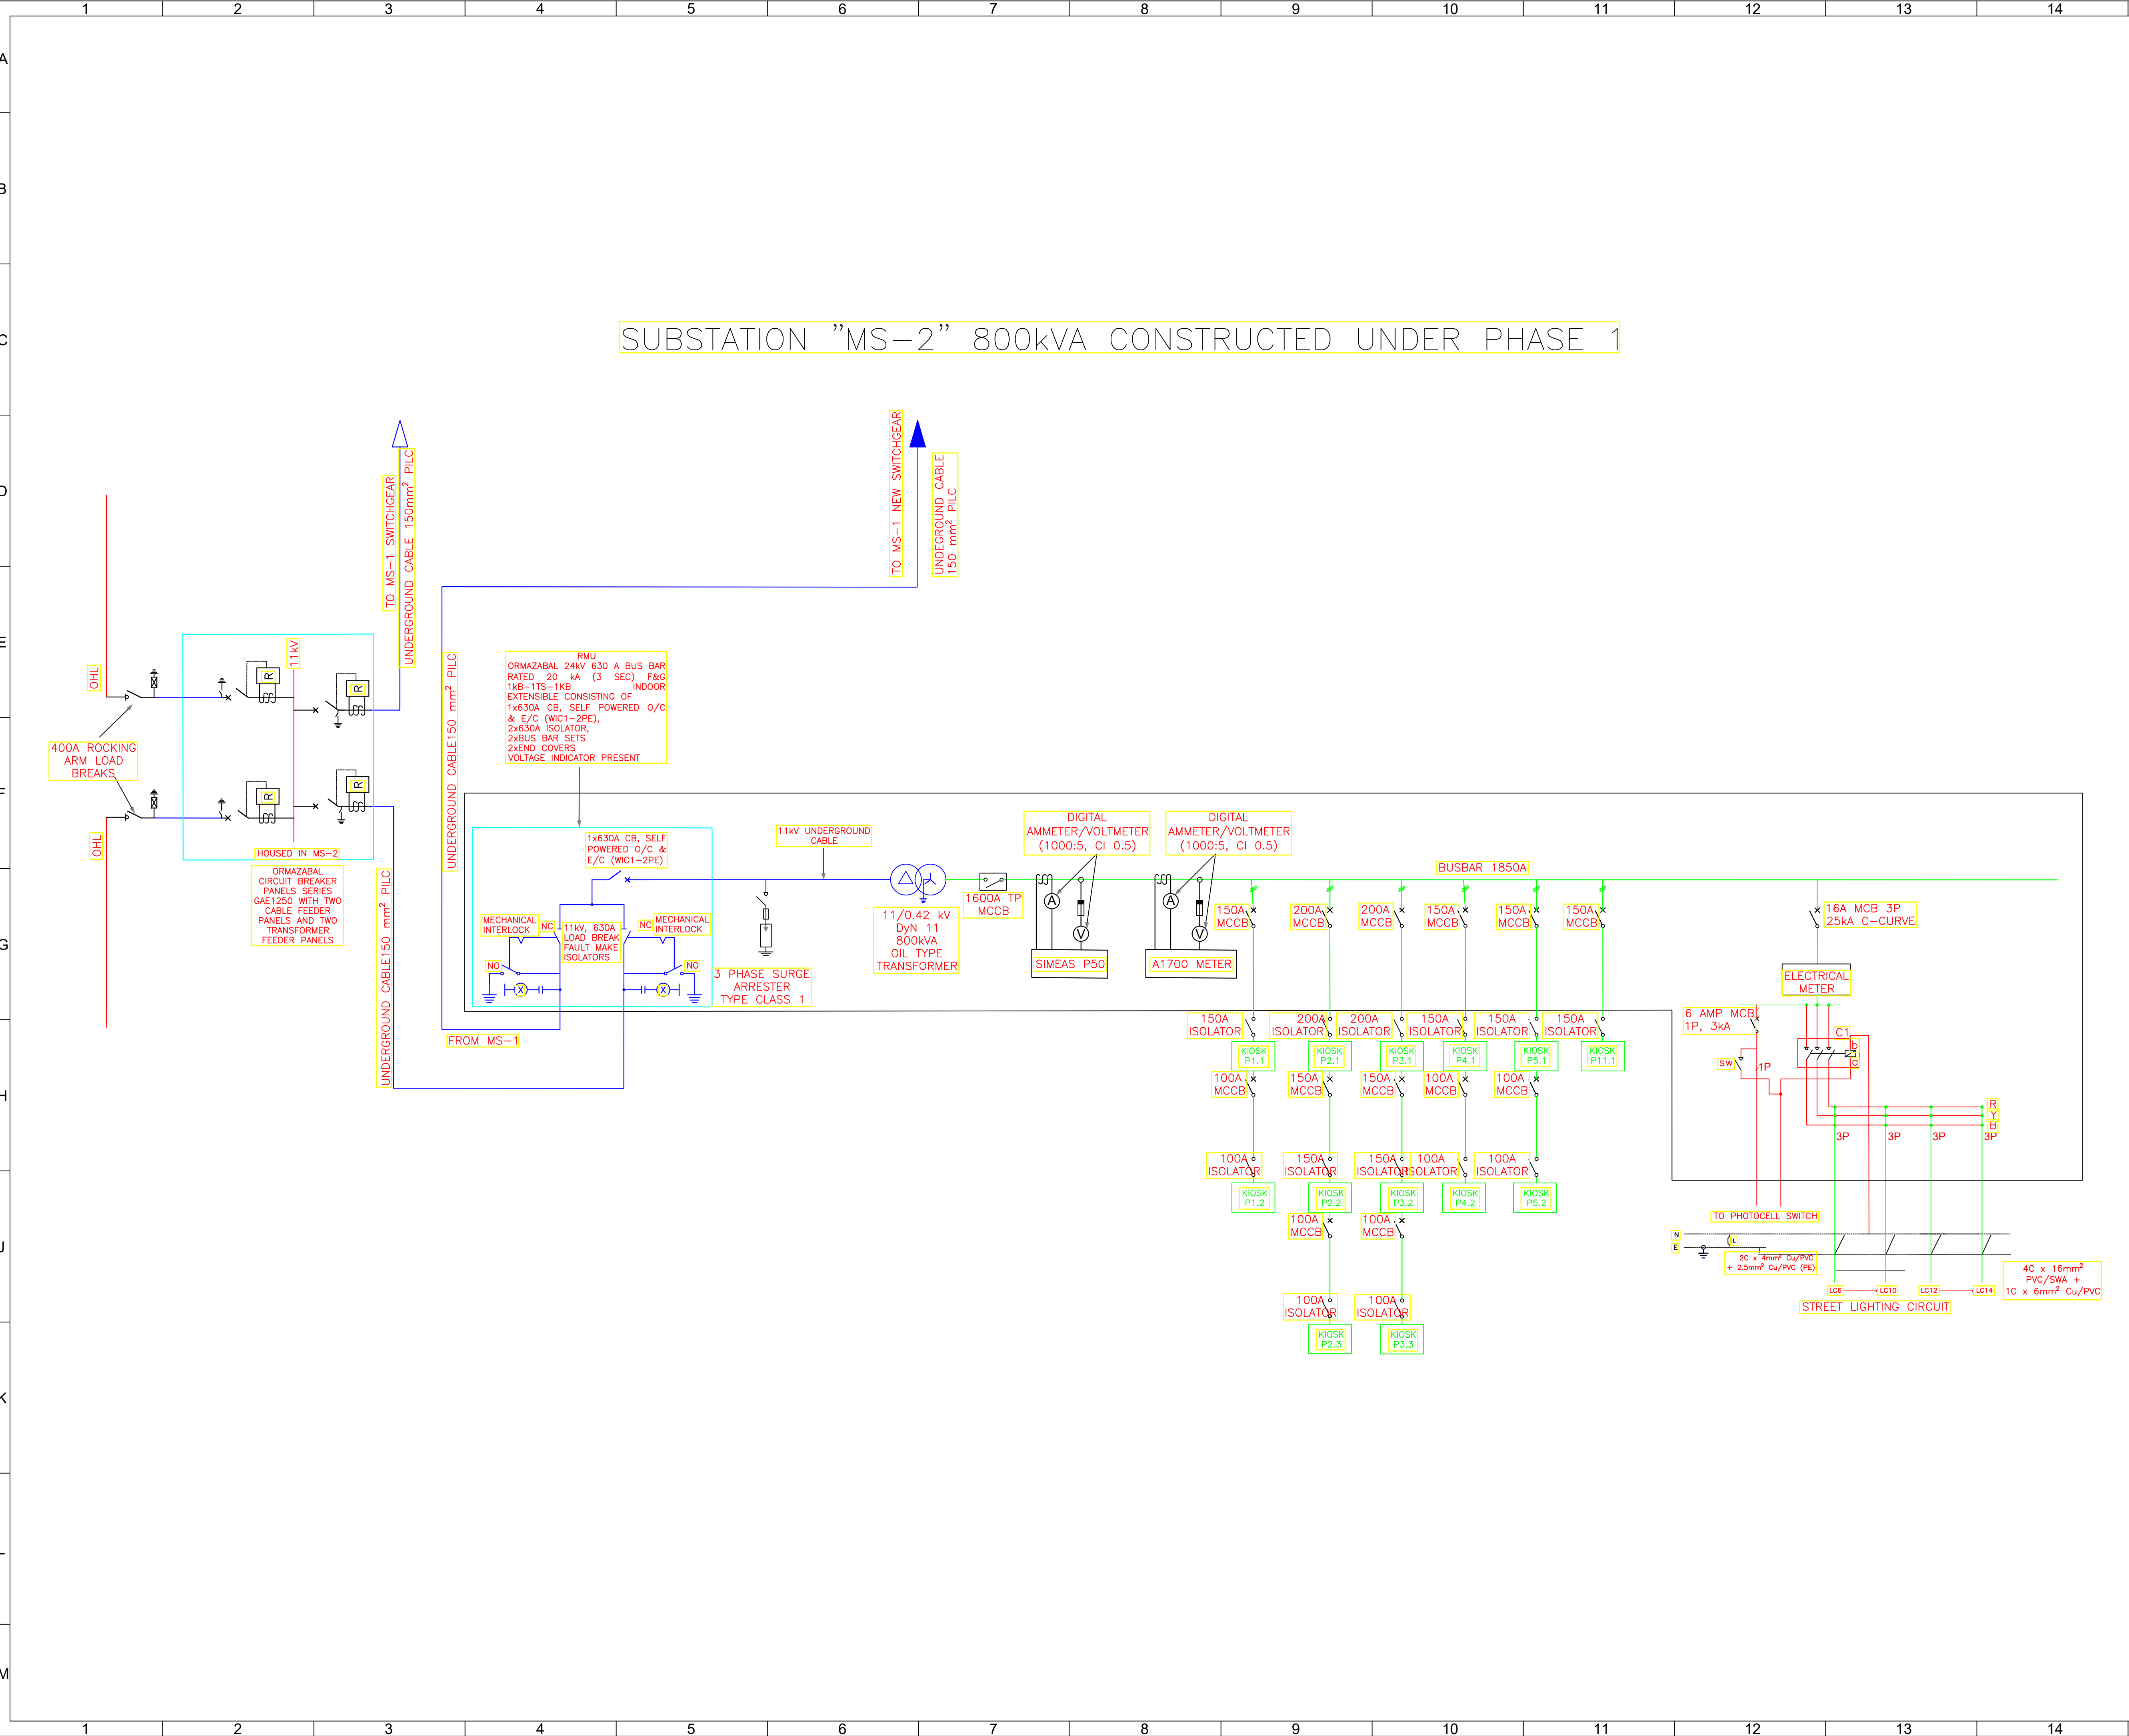

SUBSTATION "MS-2" 800kVA CONSTRUCTED UNDER PHASE 1

IMPORTANT  
CONTRACTOR TO CHECK AND VERIFY ALL DIMENSIONS AND LEVELS ON SITE PRIOR TO CONSTRUCTION. ANY DISCREPANCY TO BE REFERED TO THE ENGINEER AS SOON AS POSSIBLE. UNDER NO CIRCUMSTANCES IS THIS DRAWING TO BE SCALED.

- GENERAL NOTES:
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL ARCHITECTS, ENGINEERS AND SPECIALISTS DRAWINGS WITH THE PROJECT SPECIFICATIONS WHERE APPLICABLE.
  - ALL ELECTRICAL WORKS SHALL COMPLY WITH THESE PLANS, SPECIFICATIONS AND APPLICABLE PROVISIONS OF THE LATEST EDITION OF THE SANS 10142, BS 7671, IEC 60364, THE RULES AND REGULATION OF THE LOCAL ENFORCING AUTHORITY AND THE REQUIREMENTS OF THE LOCAL POWER SUPPLY AUTHORITY. THE ELECTRICAL WORKS SHALL BE DONE UNDER THE IMMEDIATE SUPERVISION OF A DULY REGISTERED ELECTRICAL CONTRACTOR.
  - ALL DIMENSIONS AND LEVELS TO BE CHECKED ON SITE BEFORE ANY WORK IS PUT IN HAND.
  - ALL CABLE ROUTES AND CABLE LENGTHS SHALL BE VERIFIED ON SITE BEFORE CABLES ARE CUT TO LENGTH AND INSTALLED.
  - CARE SHALL BE TAKEN DURING INSTALLATION OF POWER SUPPLY CABLES NOT TO CAUSE DAMAGE TO OTHER SERVICES INSTALLED IN THE SAME AREA AS POWER SUPPLY CABLES.
  - CABLES SHALL BE INSTALLED IN A SLEEVE WHERE POWER SUPPLY CABLES CROSS OTHER SERVICES.
  - ELECTRICAL DANGER TAPE SHALL BE INSTALLED OVER ALL POWER SUPPLY CABLES INDICATED.
  - CABLES SHALL BE INSTALLED IN THE GROUND AND IN SLEEVES AS INDICATED ON THE DETAIL DRAWING.
  - POSITION AND NECESSITY TO BE DETERMINED ON SITE.
  - TO SUIT CONDUCTOR USED FOR TIE IN AND ERONGORED REGULATION.
  - MINIMUM CLEARANCE PHASE-PHASE: 580mm.
  - MINIMUM CLEARANCE PHASE-GROUND: 432.
  - MAXIMUM LENGTH BETWEEN TIE IN STRUCTURE & FIRST SPUR STRUCTURE: 50m
  - COMBINATION OF FLAT & CURVED WASHER ON ALL INSULATORS.
  - ALL EARTH MAT JOINTS TO BE OXY-ACETYLENE BRAZED USING 3mm SILBRALLOY BRAZING LODS, WITH WELDING SEAMS AT LEAST 7mm LONG.
  - WHERE AN EARTH CLAMP IS USED TO CLAMP TAILS TO EQUIPMENT, BOLT TORQUE OF 75 Nm IS TO BE USED.

REVISIONS

| NO. | DESCRIPTION | DATE | BY |
|-----|-------------|------|----|
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |

CLIENT:  
HENTIS BAY MUNICIPALITY  
P.O.BOX 61  
HENTIES BAY  
NAMIBIA  
TEL: +264 64 502000  
FAX: +264 64 502001

COPYRIGHT RESERVED  
SIGNED: DATE:  
PROJECT MANAGERS AND ENGINEERS  
CEPM & PARTNERS  
P.O.BOX 5891  
WINDHOEK  
NAMIBIA  
TEL: +264 61 259728  
FAX: +264 886554480  
E-mail: cepm1@iway.na

PROJECT TITLE  
CONSTRUCTION OF ELECTRICAL SERVICES IN OMDEL EXTENSION 7 PHASE 2

DRAWING TITLE  
MS-1 SINGLE LINE DIAGRAM


| SCALE               | PAPER SIZE      | DESIGNED | DRAWN | CHECKED | P.E. No. |
|---------------------|-----------------|----------|-------|---------|----------|
| NTS                 | A1              | G.I      | G.I   | P.U     | PE 26000 |
| DRAWING NUMBER      | 2018-20-P2-102E | REVISION | DATE  |         |          |
| PURPOSE FOR DRAWING | TENDER DRAWINGS |          |       |         |          |







# SUPPLIED VIA LV BOARD IN MS1 INSTALLED UNDER PHASE 1

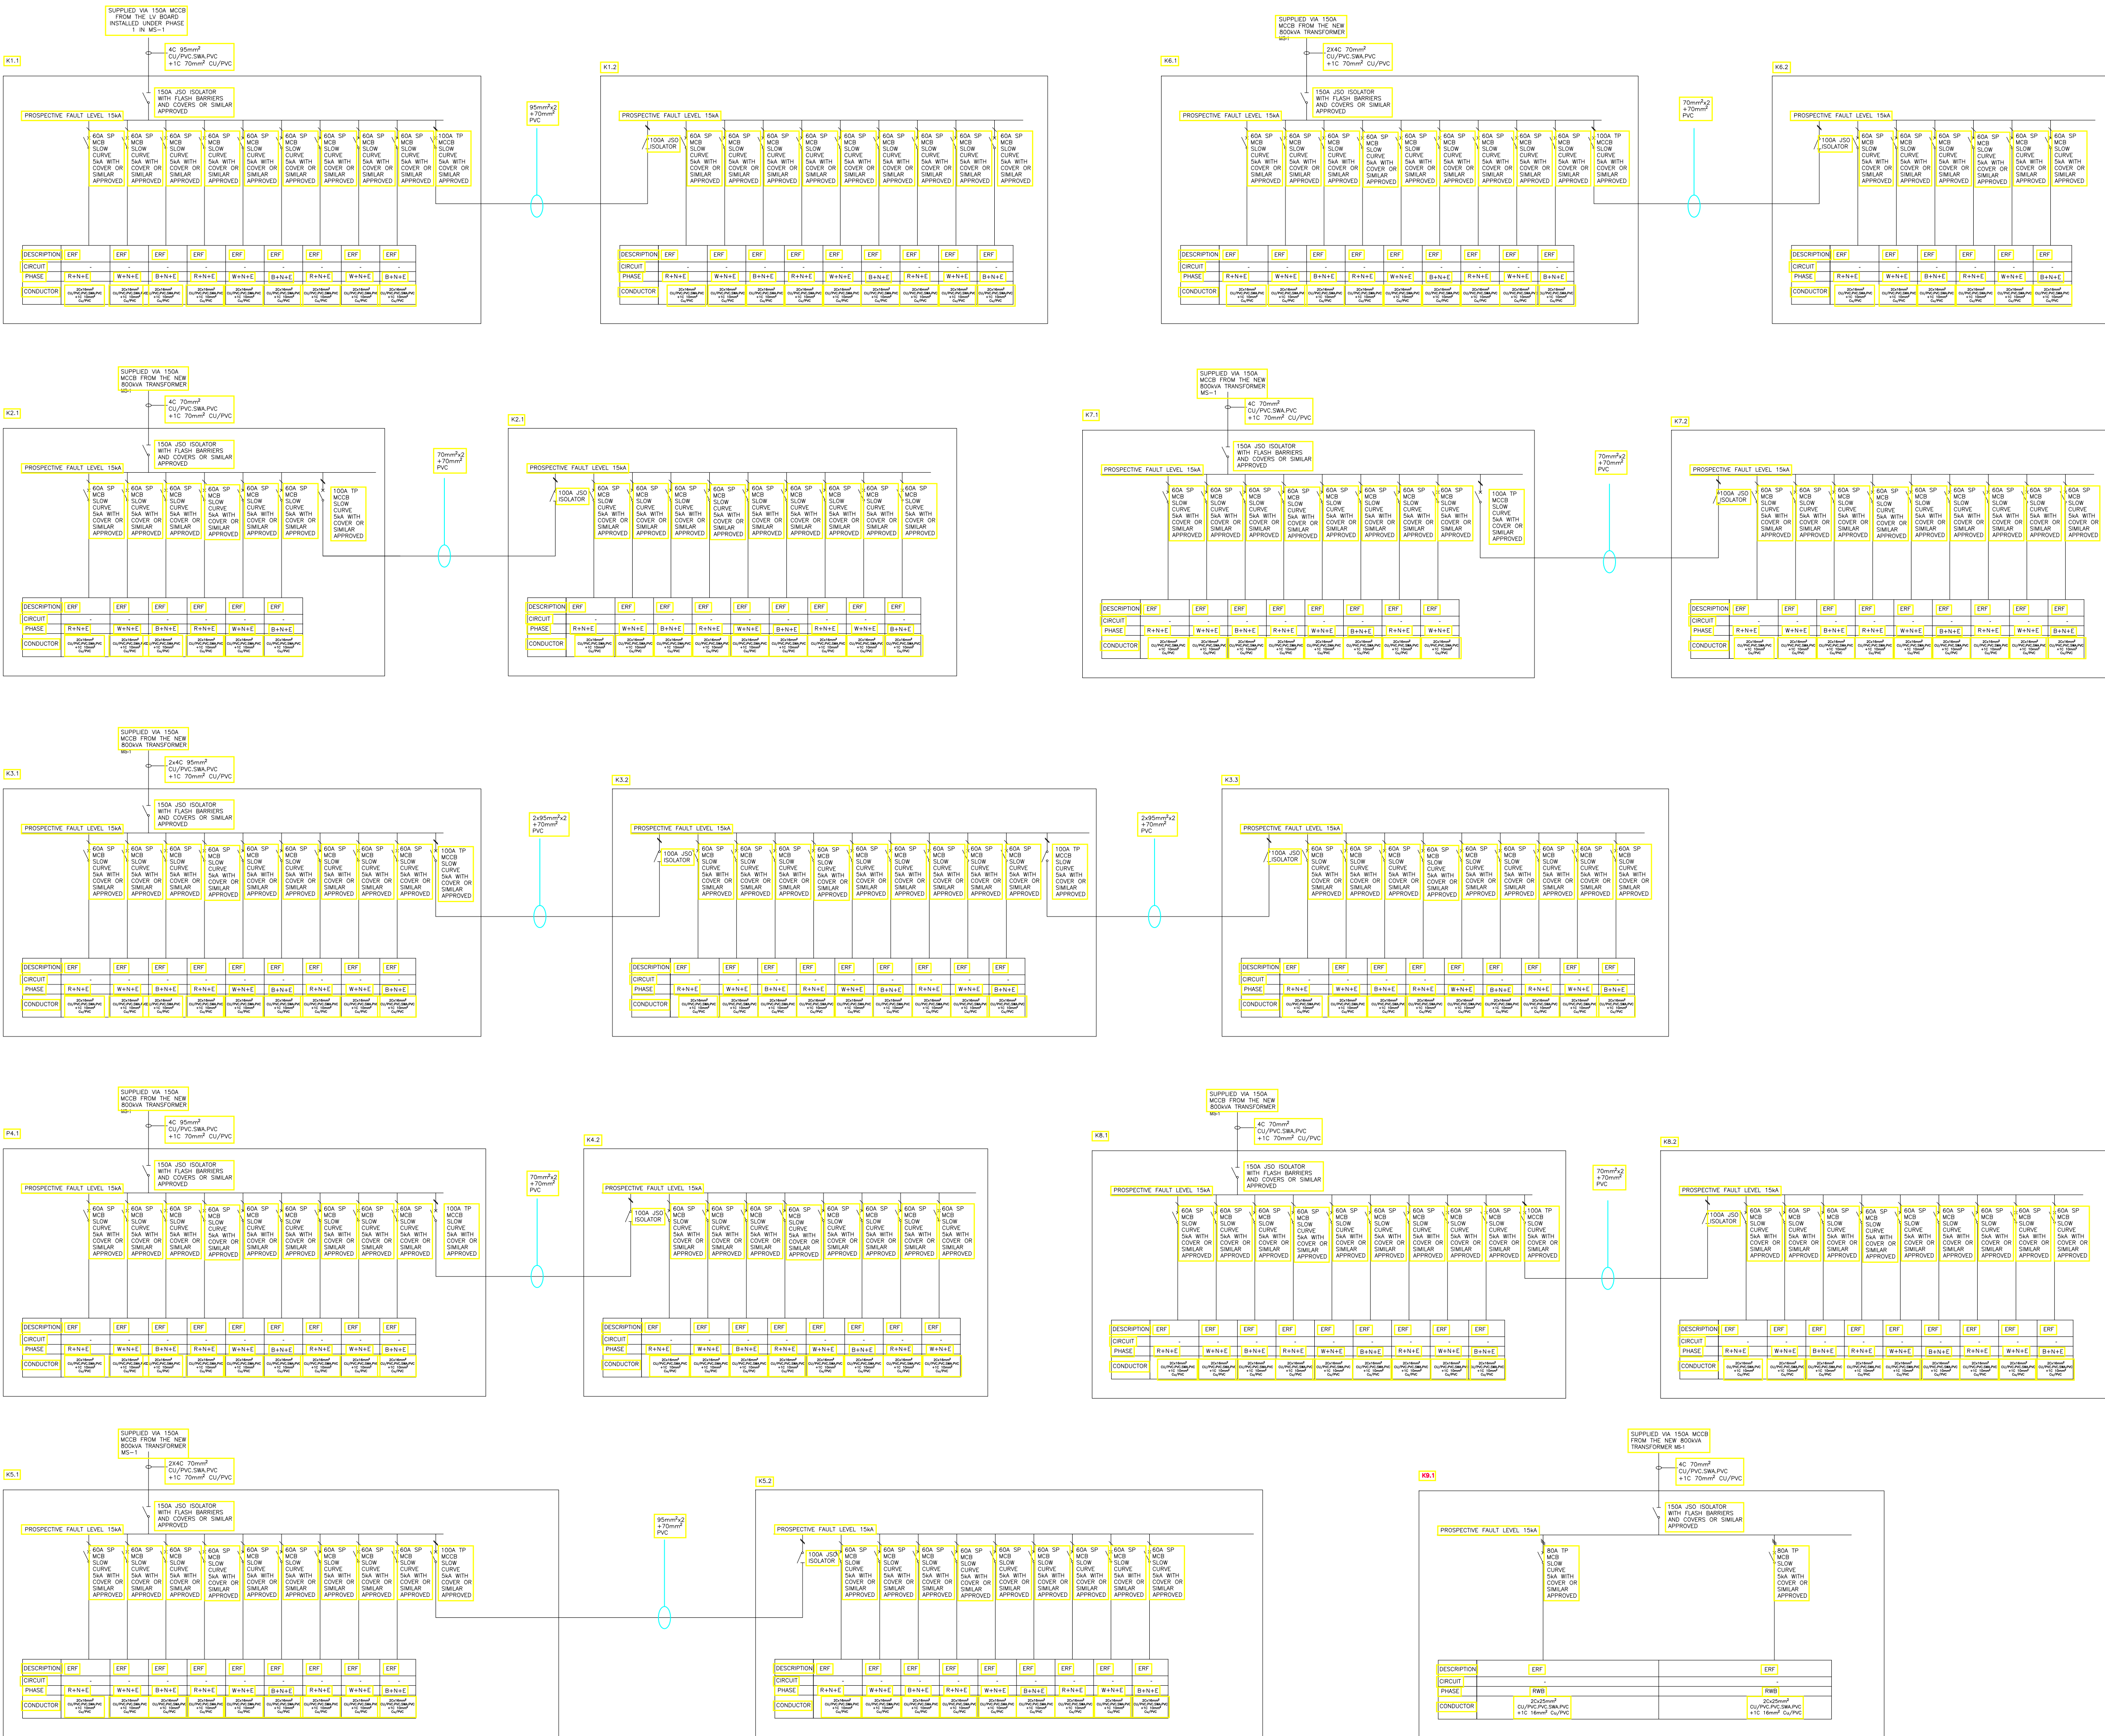

**IMPORTANT**  
CONTRACTOR TO CHECK AND VERIFY ALL DIMENSIONS AND LEVELS ON SITE PRIOR TO CONSTRUCTION. ANY DISCREPANCY TO BE REFERRED TO THE ENGINEER AS SOON AS POSSIBLE UNDER NO CIRCUMSTANCES IS THIS DRAWING TO BE SCALED.

- GENERAL NOTES:**
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL ARCHITECTS, ENGINEERS AND SPECIALISTS DRAWINGS WITH THE PROJECT SPECIFICATIONS WHERE APPLICABLE.
  - ALL ELECTRICAL WORKS SHALL COMPLY WITH THESE PLANS, SPECIFICATIONS AND APPLICABLE PROVISIONS OF THE LATEST EDITION OF THE SANS 10142, BS 7671, IEC 60364, THE RULES AND REGULATION OF THE LOCAL ENFORCING AUTHORITY AND THE REQUIREMENTS OF THE LOCAL POWER SUPPLY AUTHORITY. THE ELECTRICAL WORKS SHALL BE DONE UNDER THE IMMEDIATE SUPERVISION OF A DULY REGISTERED ELECTRICAL CONTRACTOR.
  - ALL DIMENSIONS AND LEVELS TO BE CHECKED ON SITE BEFORE ANY WORK IS PUT IN HAND.
  - ALL CABLE ROUTES AND CABLE LENGTHS SHALL BE VERIFIED ON SITE BEFORE CABLES ARE CUT TO LENGTH AND INSTALLED.
  - CARE SHALL BE TAKEN DURING INSTALLATION OF POWER SUPPLY CABLES NOT TO CAUSE DAMAGE TO OTHER SERVICES INSTALLED IN THE SAME AREA AS POWER SUPPLY CABLES.
  - CABLES SHALL BE INSTALLED IN A SLEEVE WHERE POWER SUPPLY CABLES CROSS OTHER SERVICES.
  - ELECTRICAL DANGER TAPE SHALL BE INSTALLED OVER ALL POWER SUPPLY CABLES INDICATED.
  - CABLES SHALL BE INSTALLED IN THE GROUND AND IN SLEEVES AS INDICATED ON THE DETAIL DRAWING.
  - POSITION AND NECESSITY TO BE DETERMINED ON SITE.
  - TO SUIT CONDUCTOR USED FOR TIE IN AND ERONGORED REGULATION.
  - MINIMUM CLEARANCE PHASE-PHASE: 580mm.
  - MINIMUM CLEARANCE PHASE-GROUND: 432.
  - MAXIMUM LENGTH BETWEEN TIE IN STRUCTURE & FIRST SPUR STRUCTURE: 50m
  - COMBINATION OF FLAT & CURVED WASHER ON ALL INSULATORS.

## REVISIONS

| NO. | DESCRIPTION | DATE | BY |
|-----|-------------|------|----|
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |

CLIENT:  
**HENTIS BAY MUNICIPALITY**  
P.O.BOX 61  
HENTIES BAY  
NAMIBIA  
TEL: +264 64 502000  
FAX: +264 64 502001

COPYRIGHT RESERVED  
SIGNED: \_\_\_\_\_ DATE: \_\_\_\_\_

PROJECT MANAGERS AND ENGINEERS  
**CEPM & PARTNERS**  
P.O.BOX 5891  
WINDHOEK  
NAMIBIA  
TEL: +264 61 259728  
FAX: +264 886554480  
E-mail: cepm1@iway.na

PROJECT TITLE  
**CONSTRUCTION OF ELECTRICAL SERVICES IN OMDEL EXTENSION 7 PHASE 2**









DRAWING TITLE  
**MS 1 KIOSKS FED FROM EXISTING LV BOARD**

| SCALE | PAPER SIZE | DESIGNED | DRAWN | CHECKED | P.E. No. |
|-------|------------|----------|-------|---------|----------|
| 1:250 | A1         | G.I.     | G.I.  | P.U.    | PE 26000 |

DRAWING NUMBER  
2018-20-P2-106E

PURPOSE FOR DRAWING  
TENDER DRAWINGS

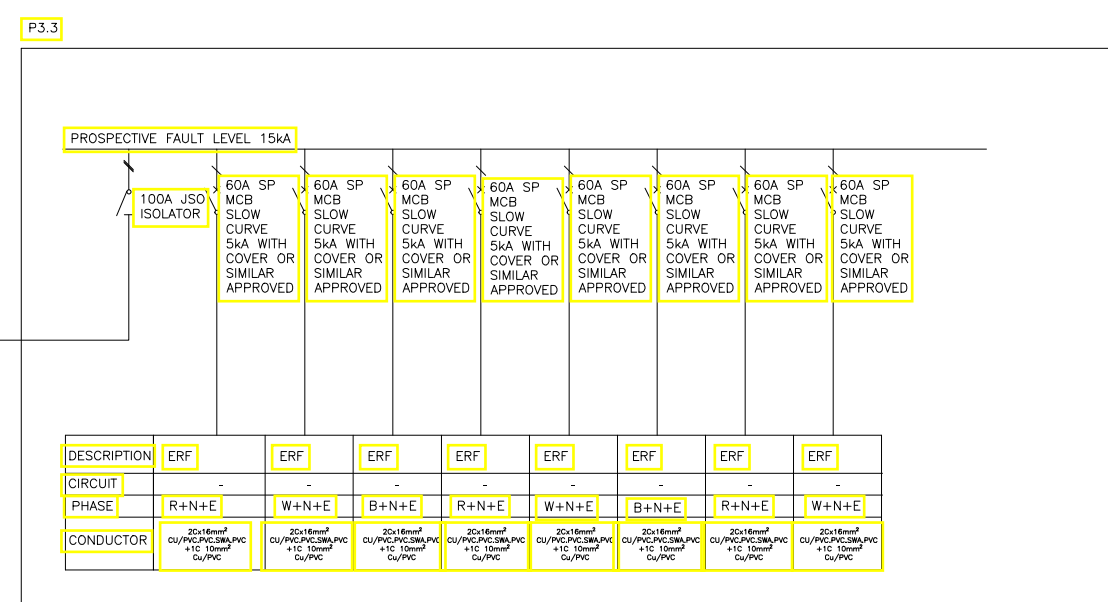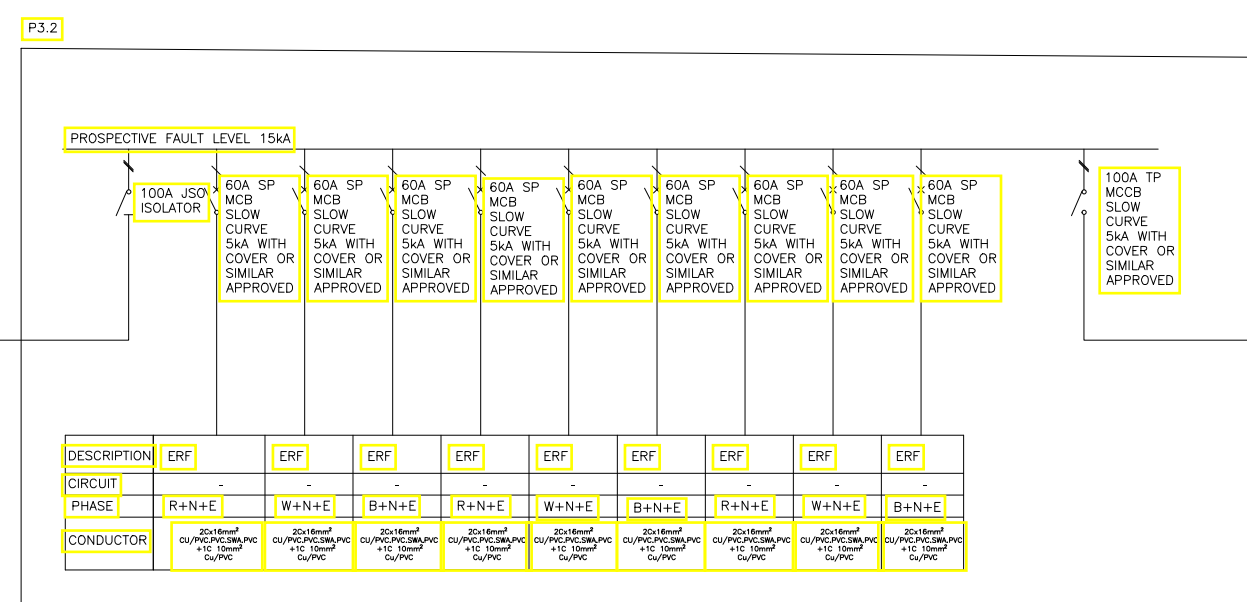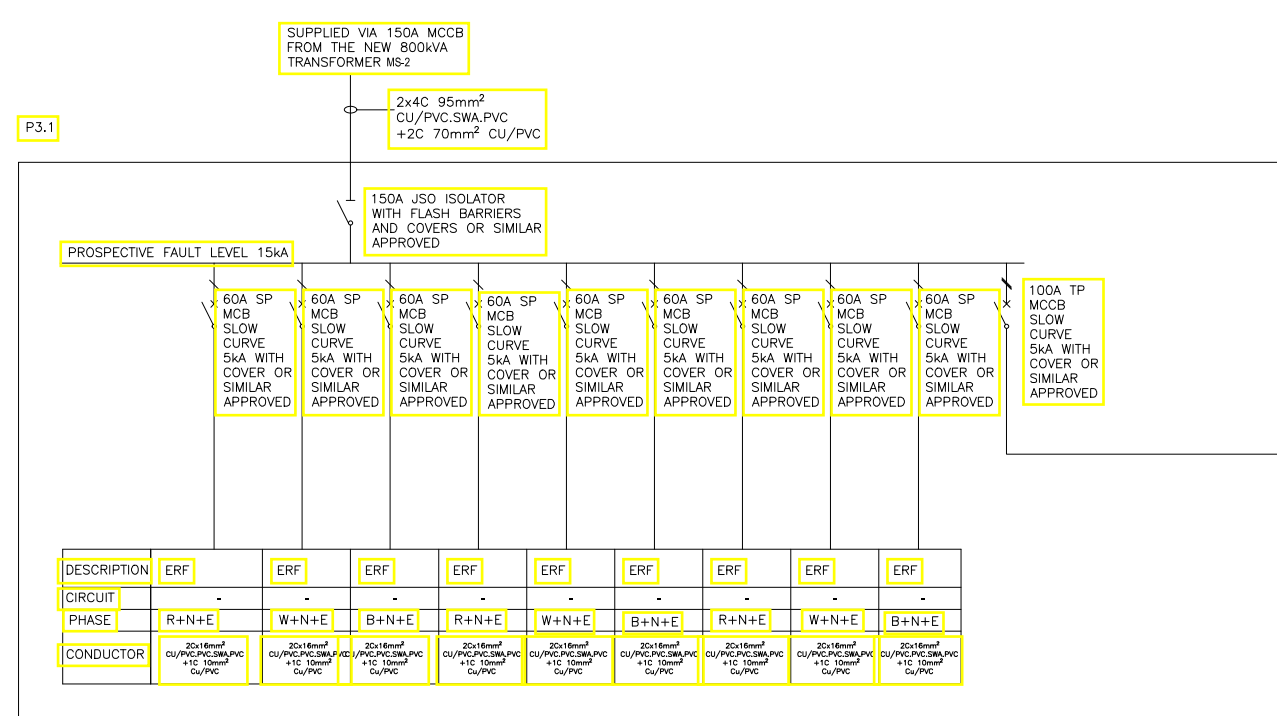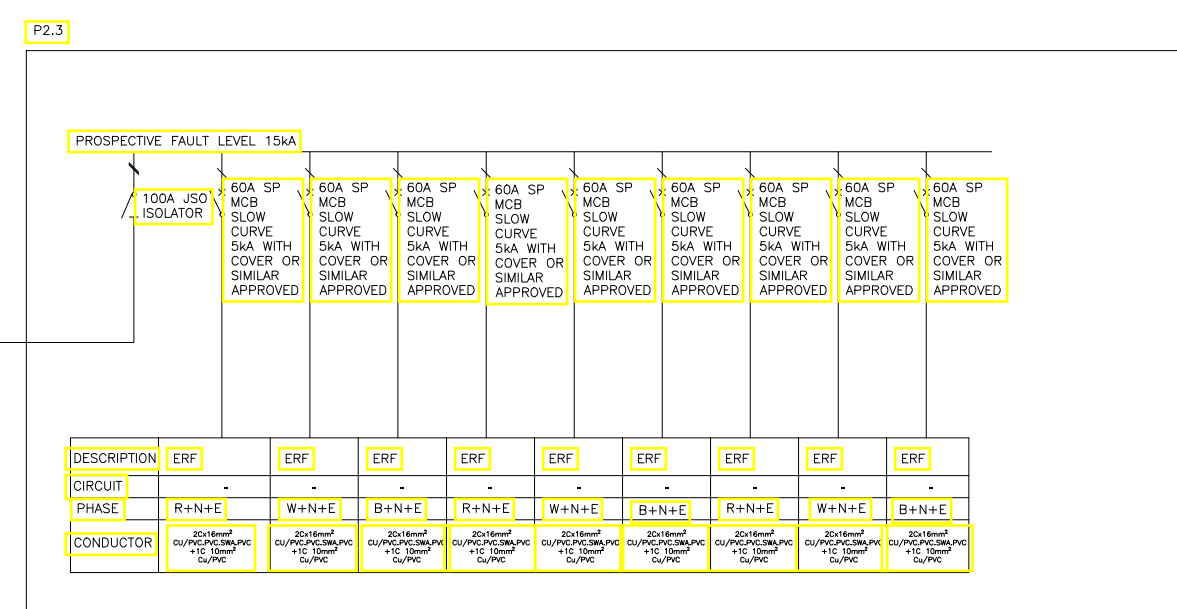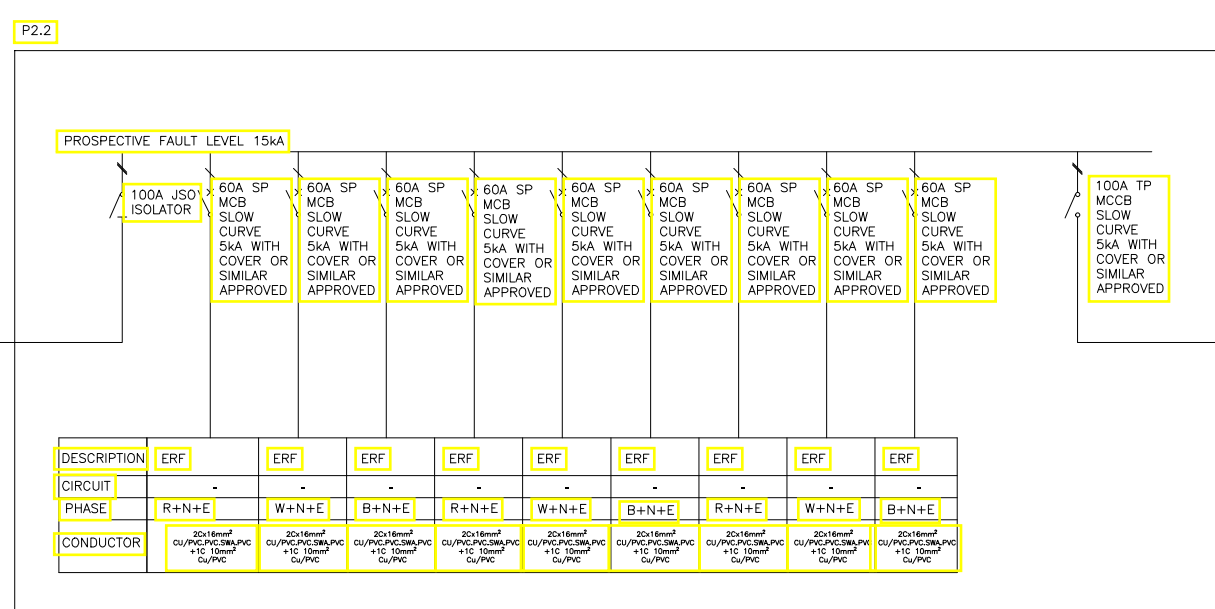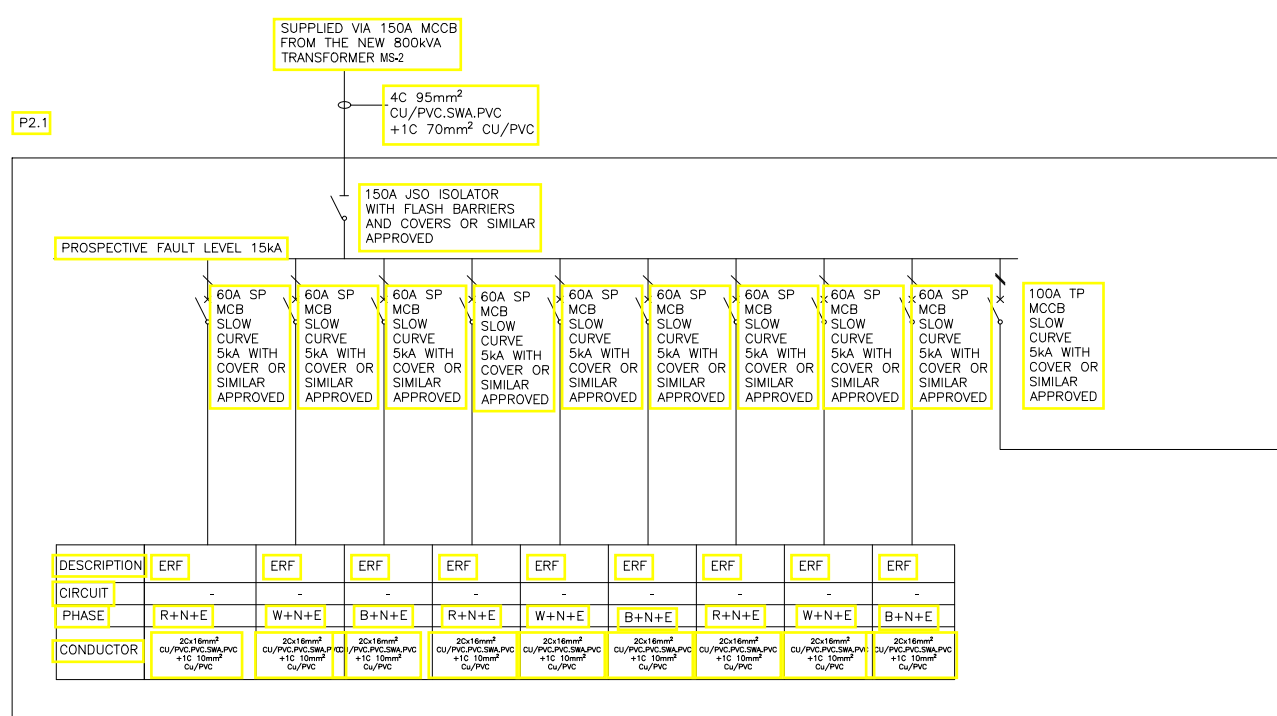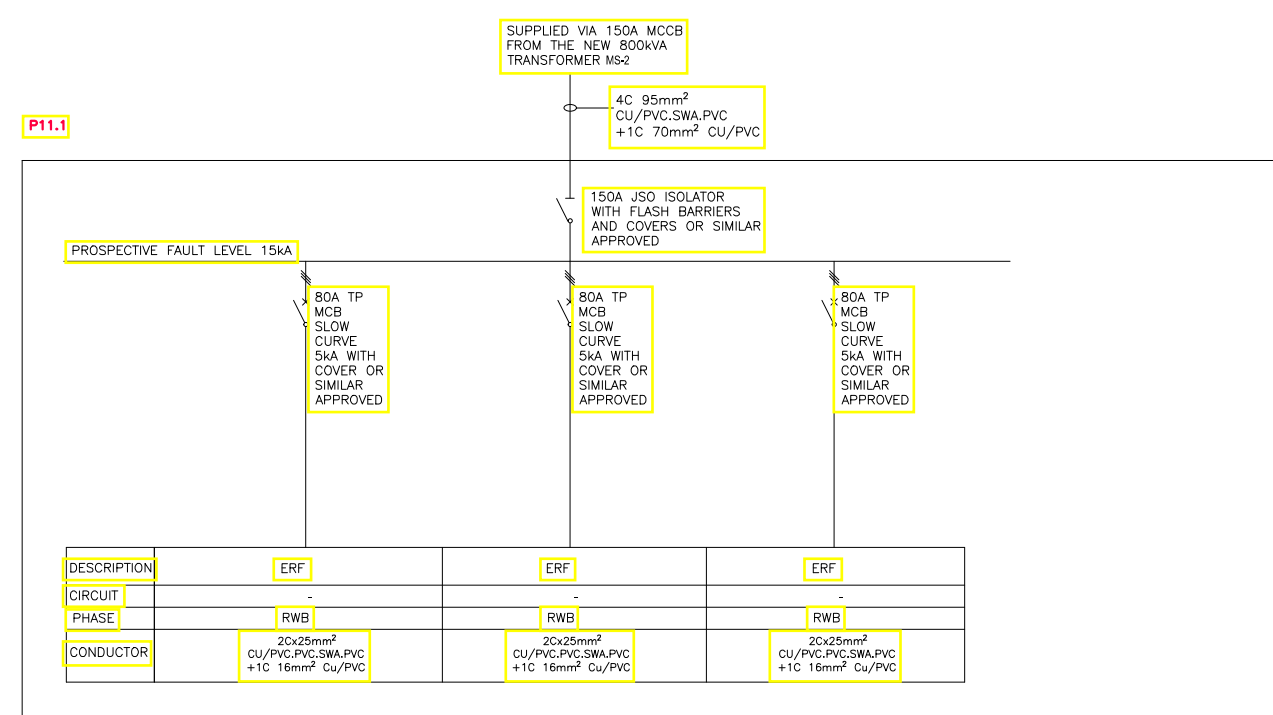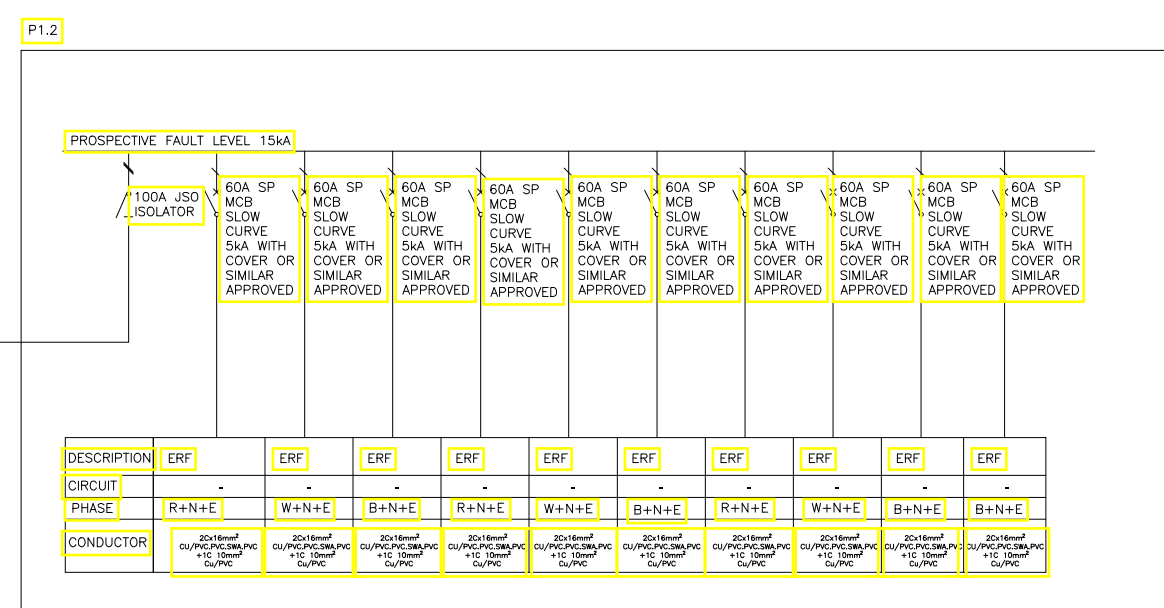

[illegible][illegible]

**CLIENT:**

**HENTIS BAY MUNICIPALITY**  
**P.O.BOX 61**  
**HENTIES BAY**  
**NAMIBIA**

TEL: +264 64 502000  
FAX: +264 64 502001

The coat of arms of Hentis Bay Municipality features a central shield with a blue background and a white cross. The shield is flanked by two yellow lions. Above the shield is a crest depicting a person on horseback. The entire emblem is encircled by a blue and white border.

|                                                                                                                                       |       |
|---------------------------------------------------------------------------------------------------------------------------------------|-------|
| COPYRIGHT RESERVED                                                                                                                    |       |
| SIGNED:                                                                                                                               | DATE: |
| PROJECT MANAGERS AND ENGINEERS                                                                                                        |       |
| <br>CEPM & PARTNERS<br>P.O.BOX 5891<br>WINDHOEK<br>NAMIBIA<br><br>TEL: +264 61 259728<br>FAX: +264 896554480<br>E-mail: cepm1@wavy.na |       |

## CONSTRUCTION OF ELECTRICAL SERVICES IN OMDEL EXTENSION 7 PHASE 2









DRAWING TITLE

MS 2 KIOSKS  
FED FROM EXISTING LV BOARD

|                                               |                  |                 |              |                |                      |
|-----------------------------------------------|------------------|-----------------|--------------|----------------|----------------------|
| SCALE<br>1:1250                               | PAPER SIZE<br>A1 | DESIGNED<br>G.I | DRAWN<br>G.I | CHECKED<br>P.U | P.E. No.<br>PE 26000 |
| DRAWING NUMBER<br>2018-20-P2-107E             |                  |                 |              | REVISION       | DATE                 |
| PURPOSE FOR DRAWING<br><b>TENDER DRAWINGS</b> |                  |                 |              |                |                      |



# SUPPLIED VIA NEW LV 800kVA BOARD IN MS 2 FED BY A NEW 800kVA TRF

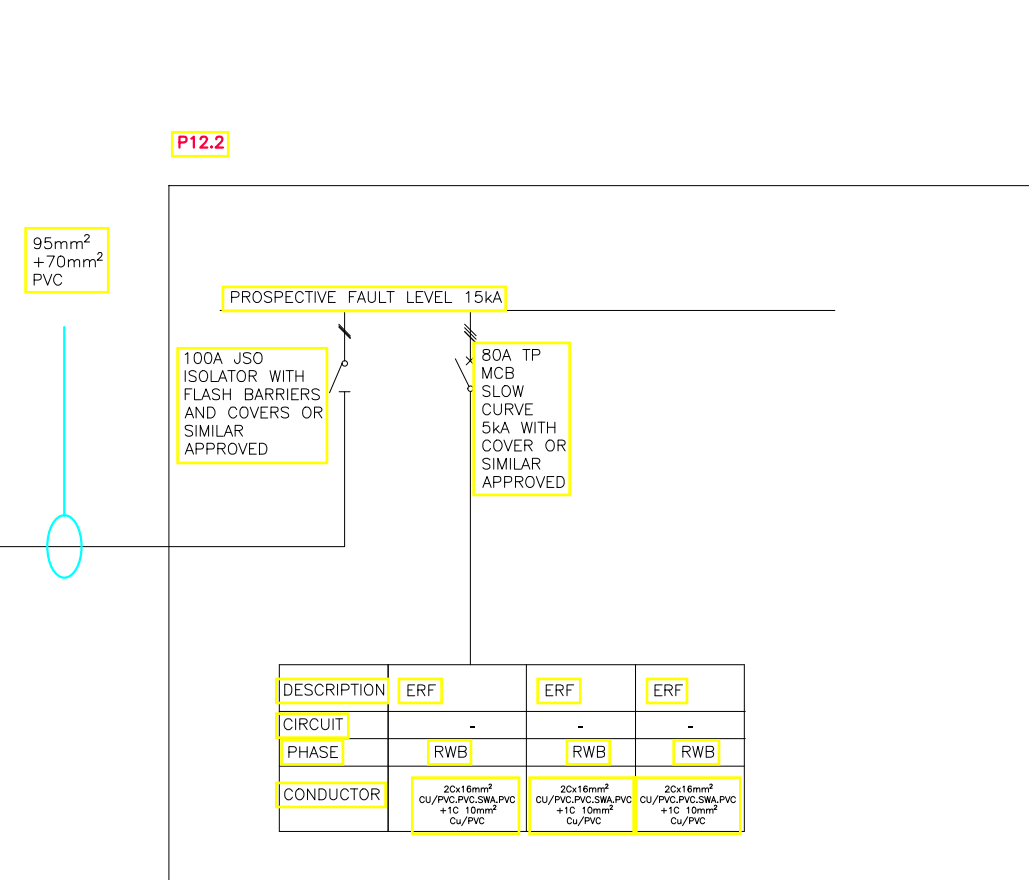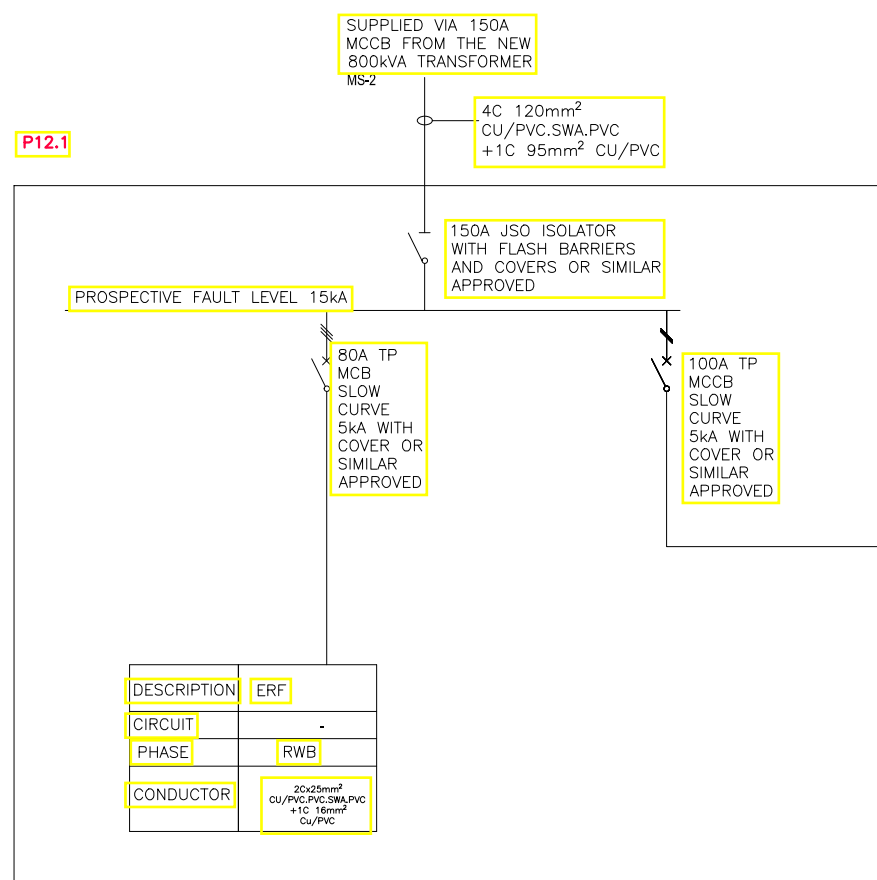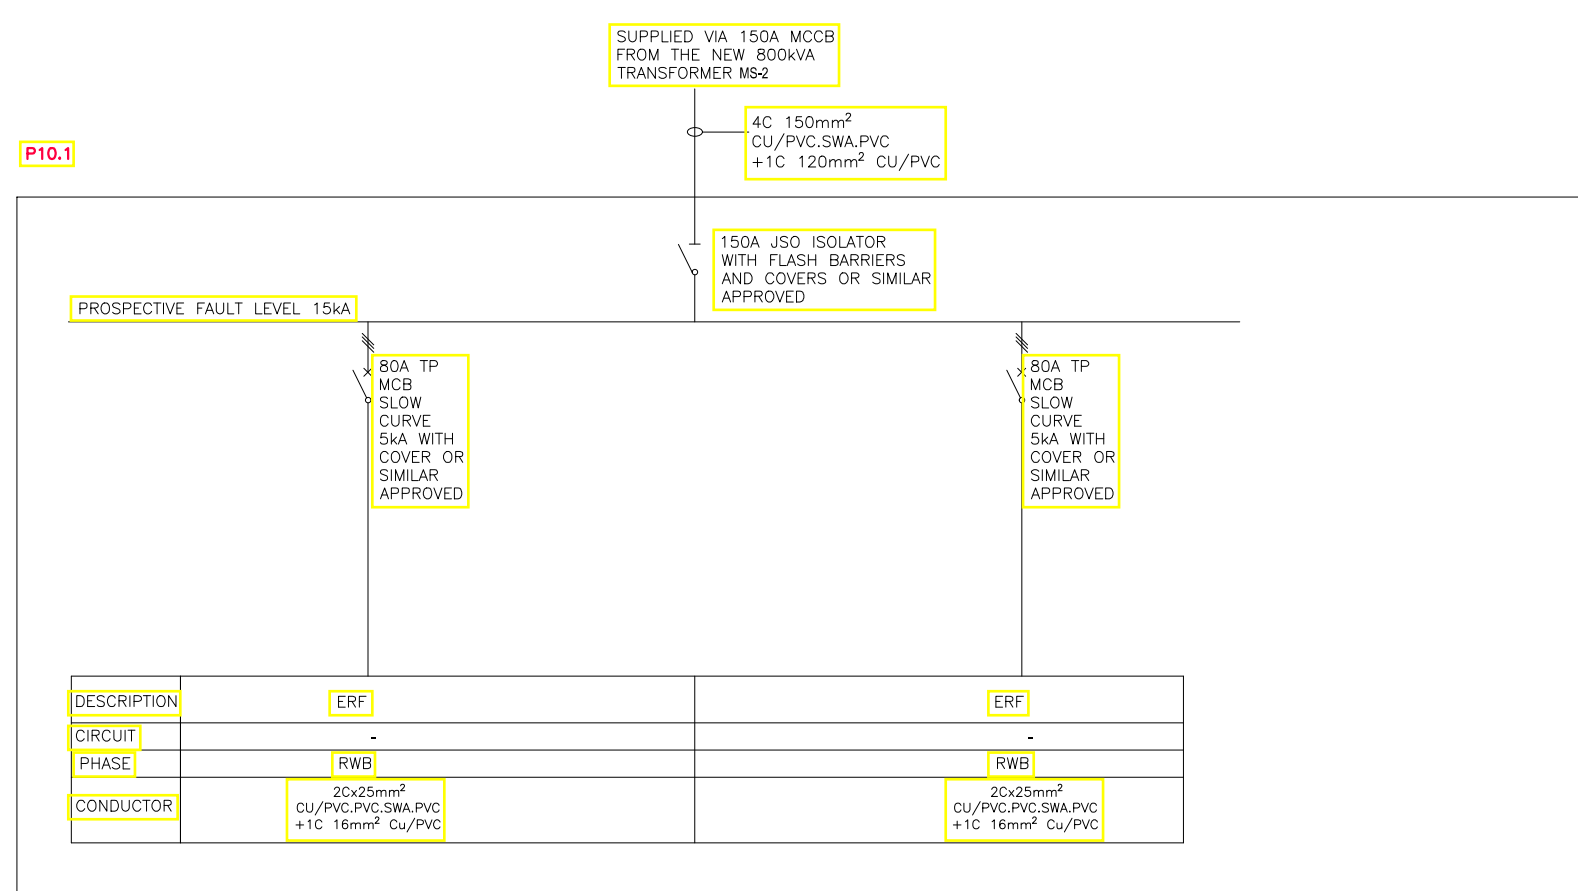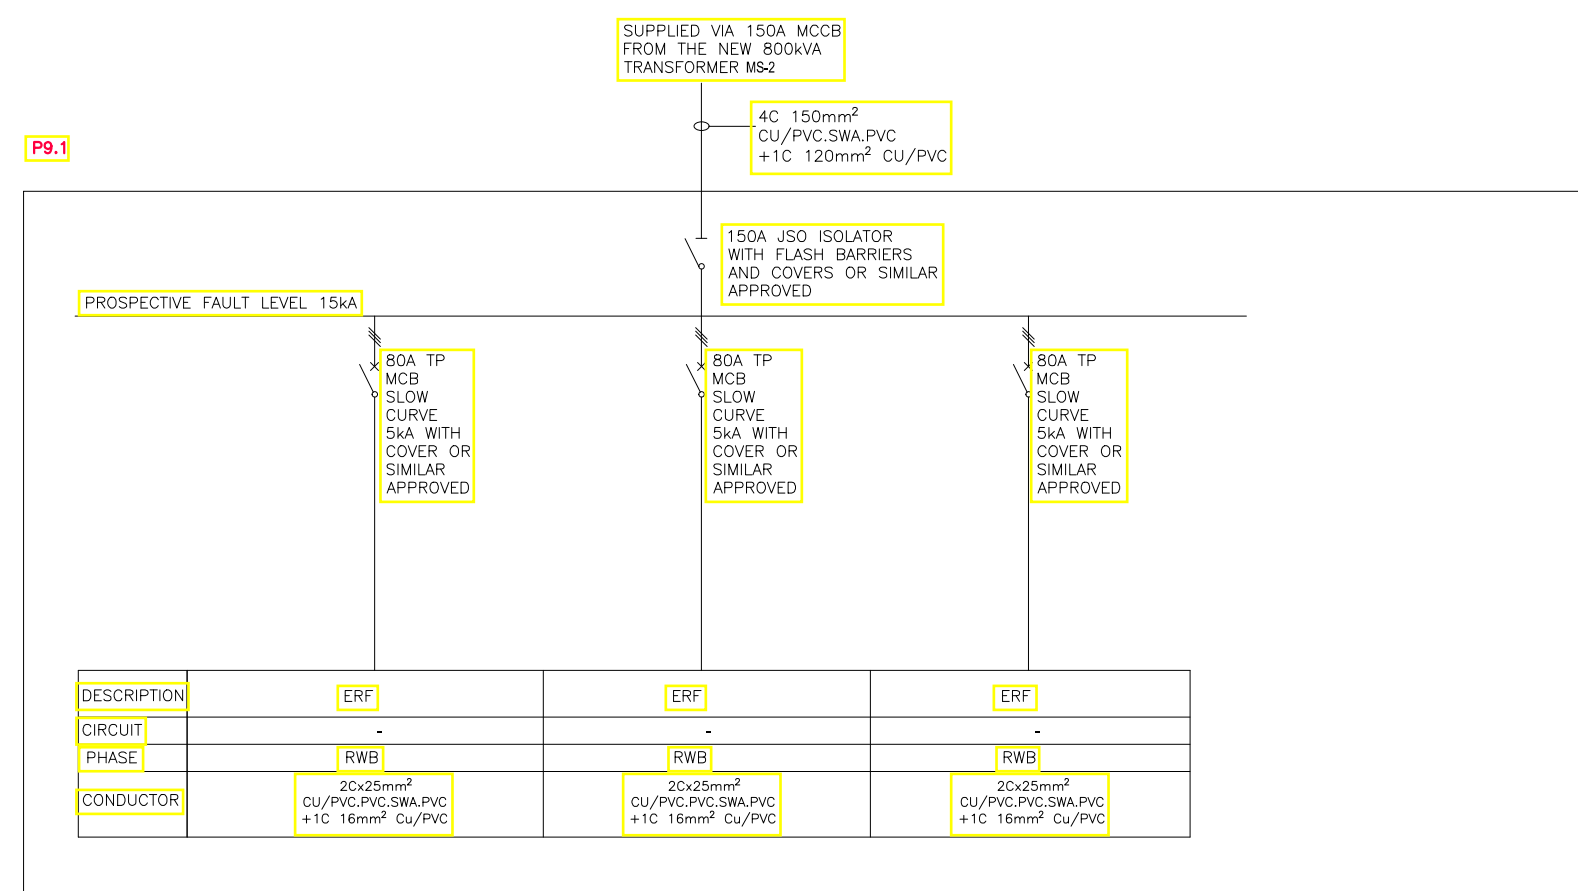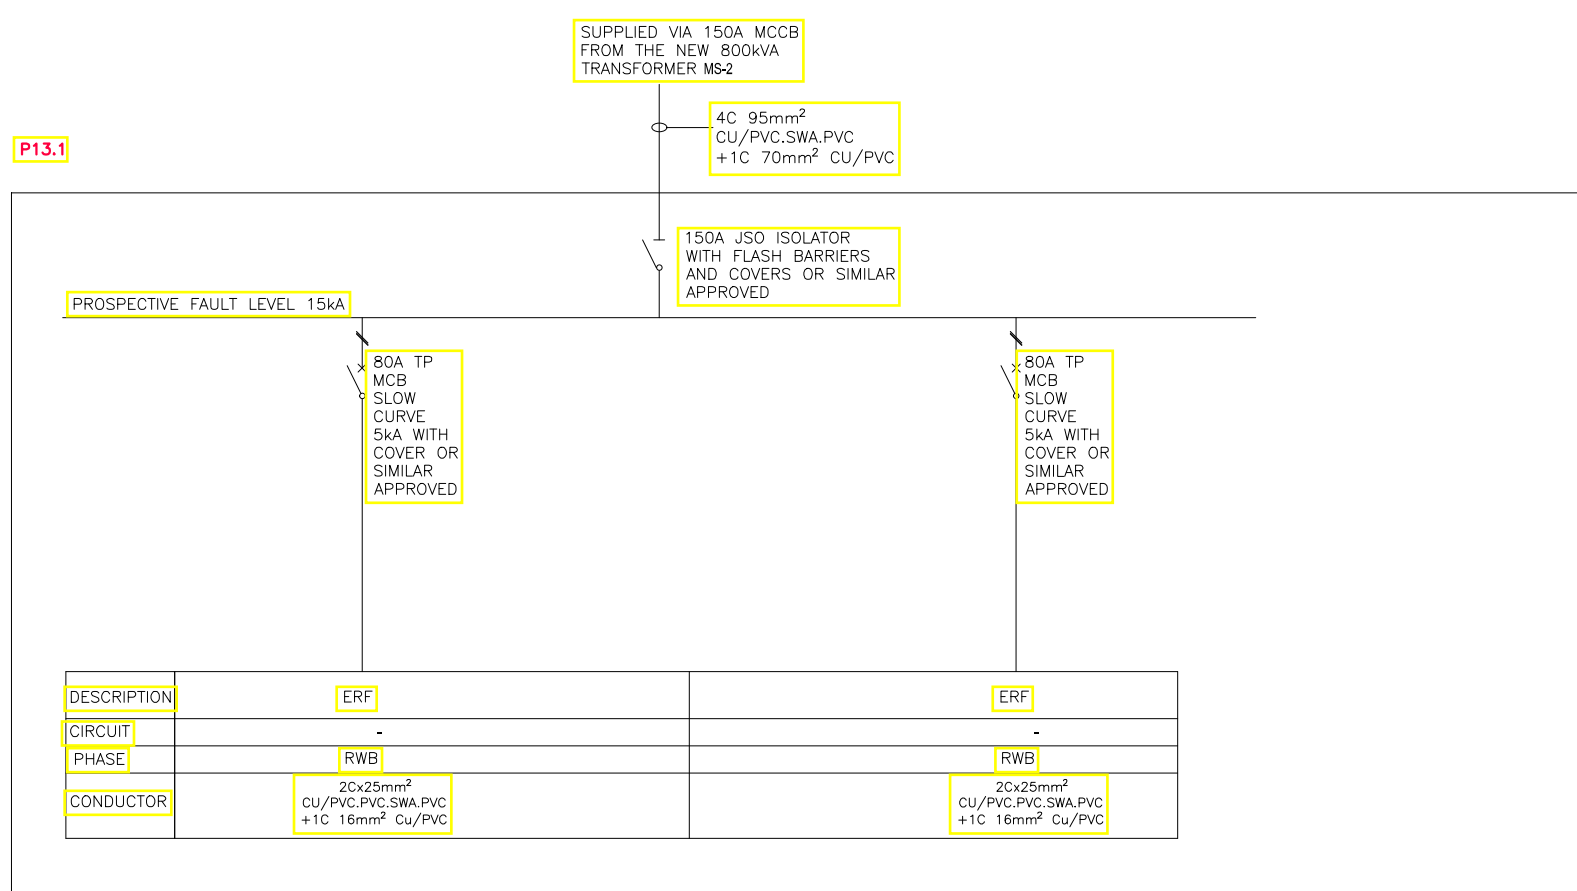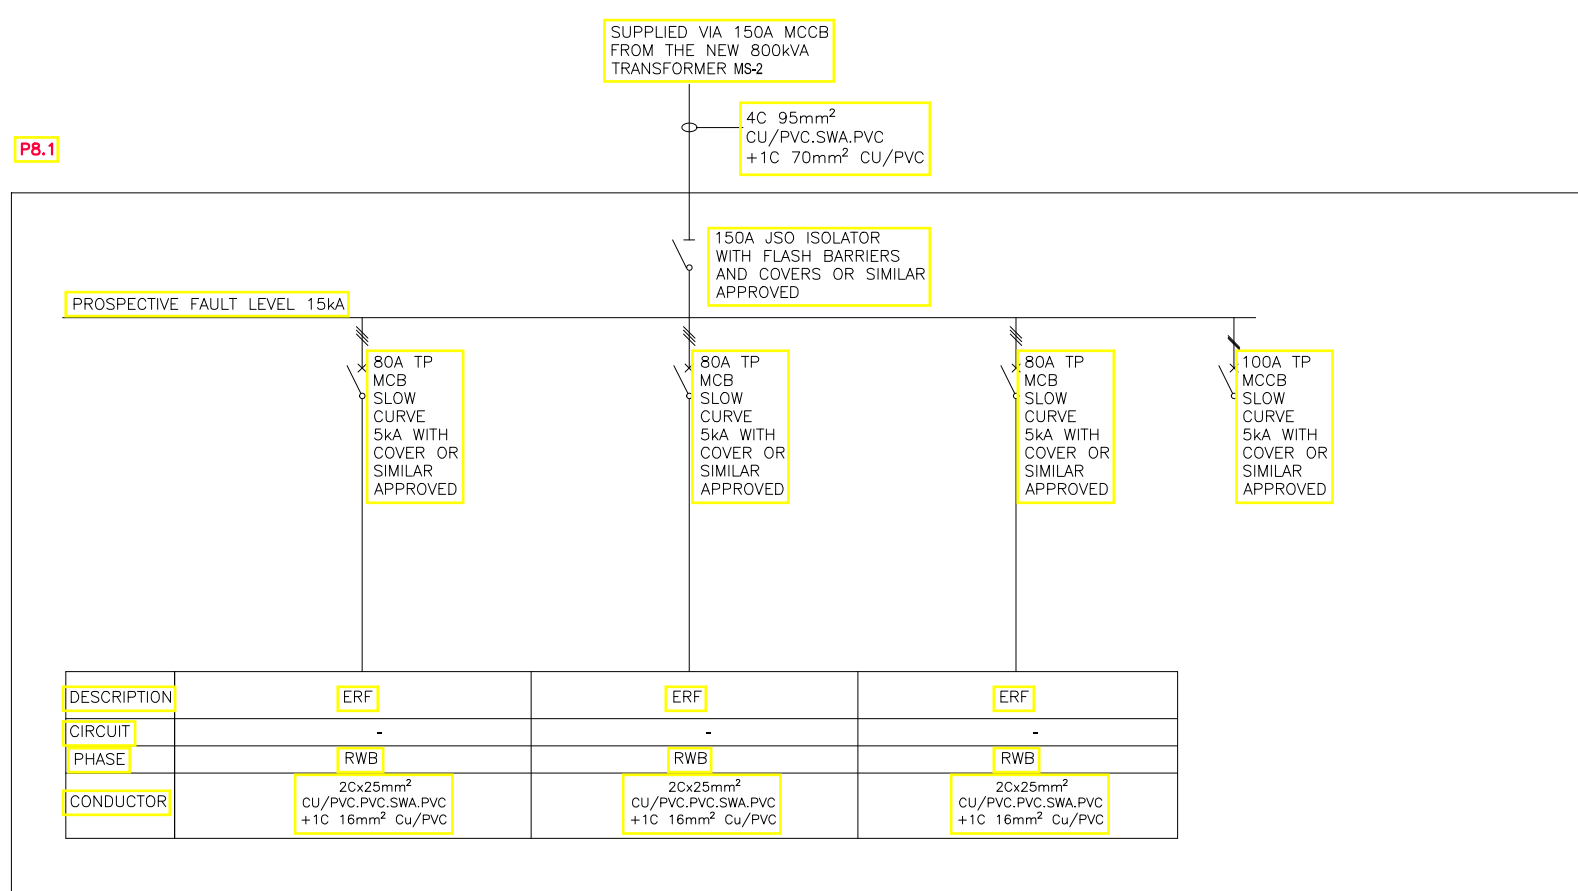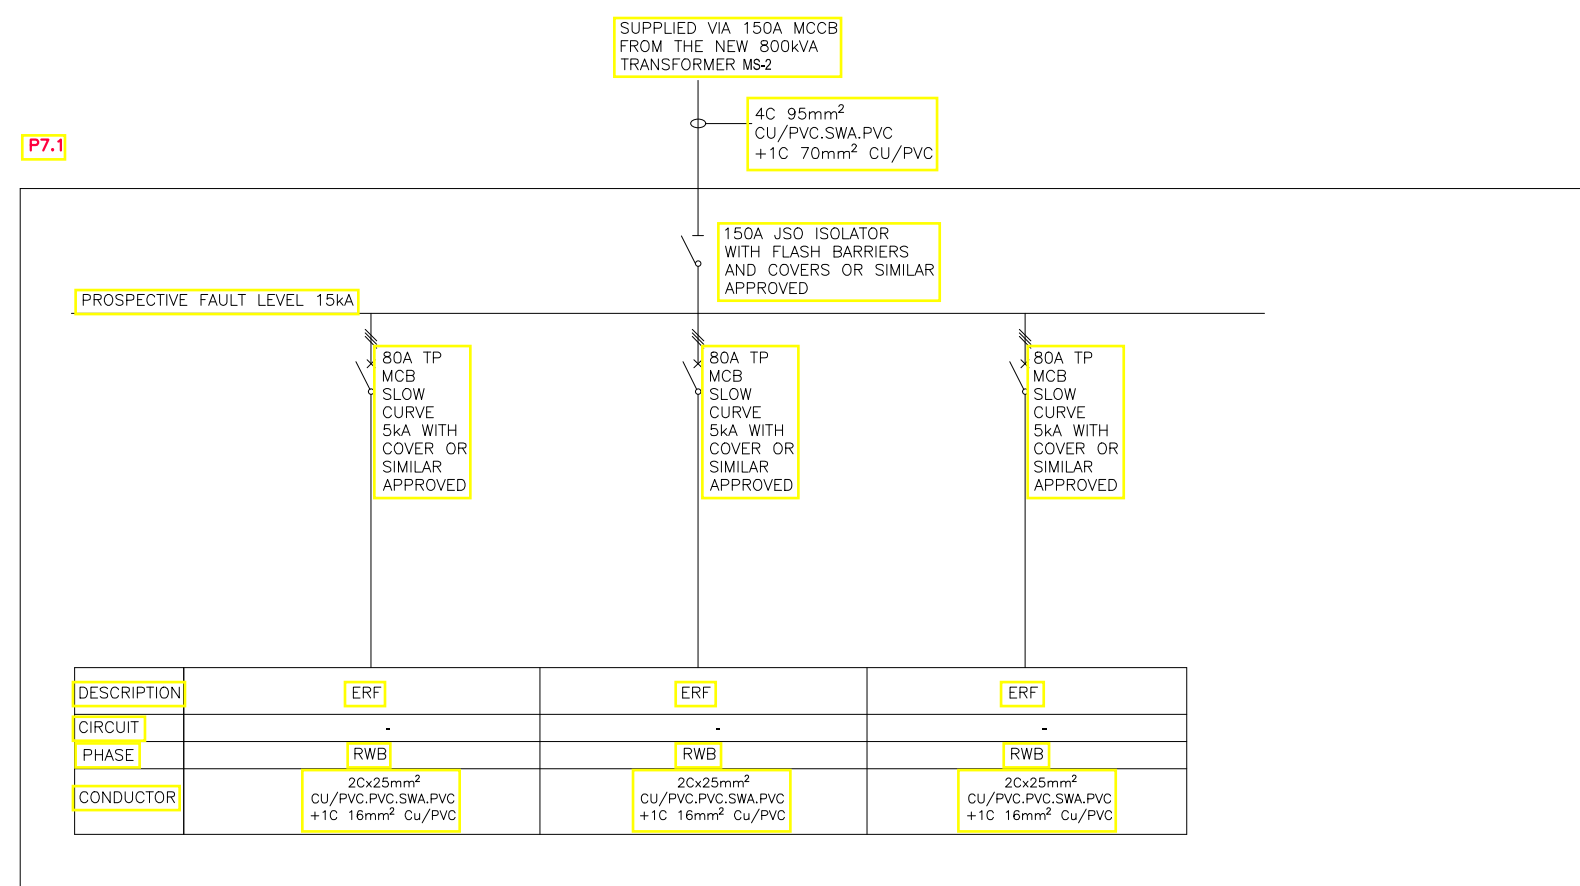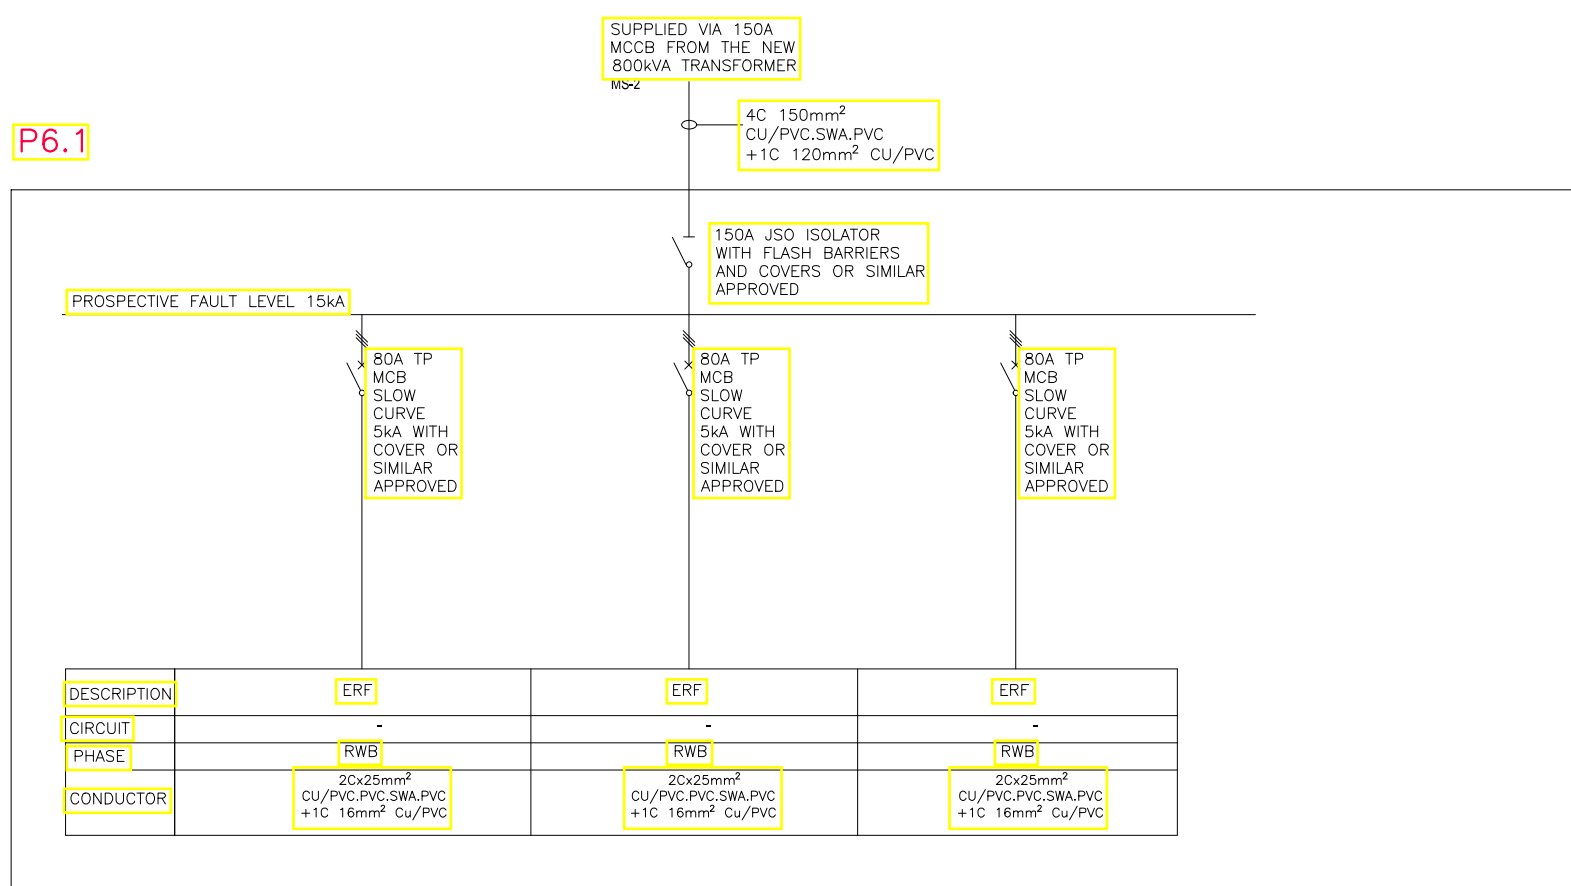

**IMPORTANT**  
CONTRACTOR TO CHECK AND VERIFY ALL DIMENSIONS AND LEVELS ON SITE PRIOR TO CONSTRUCTION. ANY DISCREPANCY TO BE REFERRED TO THE ENGINEER AS SOON AS POSSIBLE UNDER NO CIRCUMSTANCES IS THIS DRAWING TO BE SCALED.

## GENERAL NOTES:

- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL ARCHITECTS, ENGINEERS AND SPECIALISTS DRAWINGS WITH THE PROJECT SPECIFICATIONS WHERE APPLICABLE.
- ALL ELECTRICAL WORKS SHALL COMPLY WITH THESE PLANS, SPECIFICATIONS AND APPLICABLE PROVISIONS OF THE LATEST EDITION OF THE SANS 10142, BS 7671, IEC 60364. THE RULES AND REGULATION OF THE LOCAL ENFORCING AUTHORITY AND THE REQUIREMENTS OF THE LOCAL POWER SUPPLY AUTHORITY. THE ELECTRICAL WORKS SHALL BE DONE UNDER THE IMMEDIATE SUPERVISION OF A DULY REGISTERED ELECTRICAL CONTRACTOR.
- ALL DIMENSIONS AND LEVELS TO BE CHECKED ON SITE BEFORE ANY WORK IS PUT IN HAND.
- ALL CABLE ROUTES AND CABLE LENGTHS SHALL BE VERIFIED ON SITE BEFORE CABLES ARE CUT TO LENGTH AND INSTALLED.
- CARE SHALL BE TAKEN DURING INSTALLATION OF POWER SUPPLY CABLES NOT TO CAUSE DAMAGE TO OTHER SERVICES INSTALLED IN THE SAME AREA AS POWER SUPPLY CABLES.
- CABLES SHALL BE INSTALLED IN A SLEEVE WHERE POWER SUPPLY CABLES CROSS OTHER SERVICES.
- ELECTRICAL DANGER TAPE SHALL BE INSTALLED OVER ALL POWER SUPPLY CABLES INDICATED.
- CABLES SHALL BE INSTALLED IN THE GROUND AND IN SLEEVES AS INDICATED ON THE DETAIL DRAWING.
- POSITION AND NECESSITY TO BE DETERMINED ON SITE.
- TO SUIT CONDUCTOR USED FOR TIE IN AND ERONGORED REGULATION.
- MINIMUM CLEARANCE PHASE-PHASE: 580mm.
- MINIMUM CLEARANCE PHASE-GROUND: 432.
- MAXIMUM LENGTH BETWEEN TIE IN STRUCTURE & FIRST SPUR STRUCTURE: 50m
- COMBINATION OF FLAT & CURVED WASHER ON ALL INSULATORS.

## REVISIONS

| NO. | DESCRIPTION | DATE | BY |
|-----|-------------|------|----|
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |
|     |             |      |    |

## CLIENT:

HENTIS BAY MUNICIPALITY  
P.O.BOX 61  
HENTIES BAY  
NAMIBIA

TEL: +264 64 502000  
FAX: +264 64 502001



## COPYRIGHT RESERVED

SIGNED: DATE:

## PROJECT MANAGERS AND ENGINEERS

CEPM & PARTNERS  
P.O.BOX 5891  
WINDHOEK  
NAMIBIA

TEL: +264 61 259728  
FAX: +264 886554480  
E-mail: cepm1@iway.na



## PROJECT TITLE

CONSTRUCTION OF ELECTRICAL  
SERVICES IN OMDEL EXTENSION 7  
PHASE 2

## DRAWING TITLE


MS 2 KIOSKS  
FED FROM NEW LV BOARD

| SCALE  | PAPER SIZE | DESIGNED | DRAWN | CHECKED | P.E. No. |
|--------|------------|----------|-------|---------|----------|
| 1:1250 | A1         | G.I      | G.I   | P.U     | PE 26000 |

| DRAWING NUMBER  | REVISION | DATE |
|-----------------|----------|------|
| 2018-20-P2-108E |          |      |

PURPOSE FOR DRAWING  
TENDER DRAWINGS



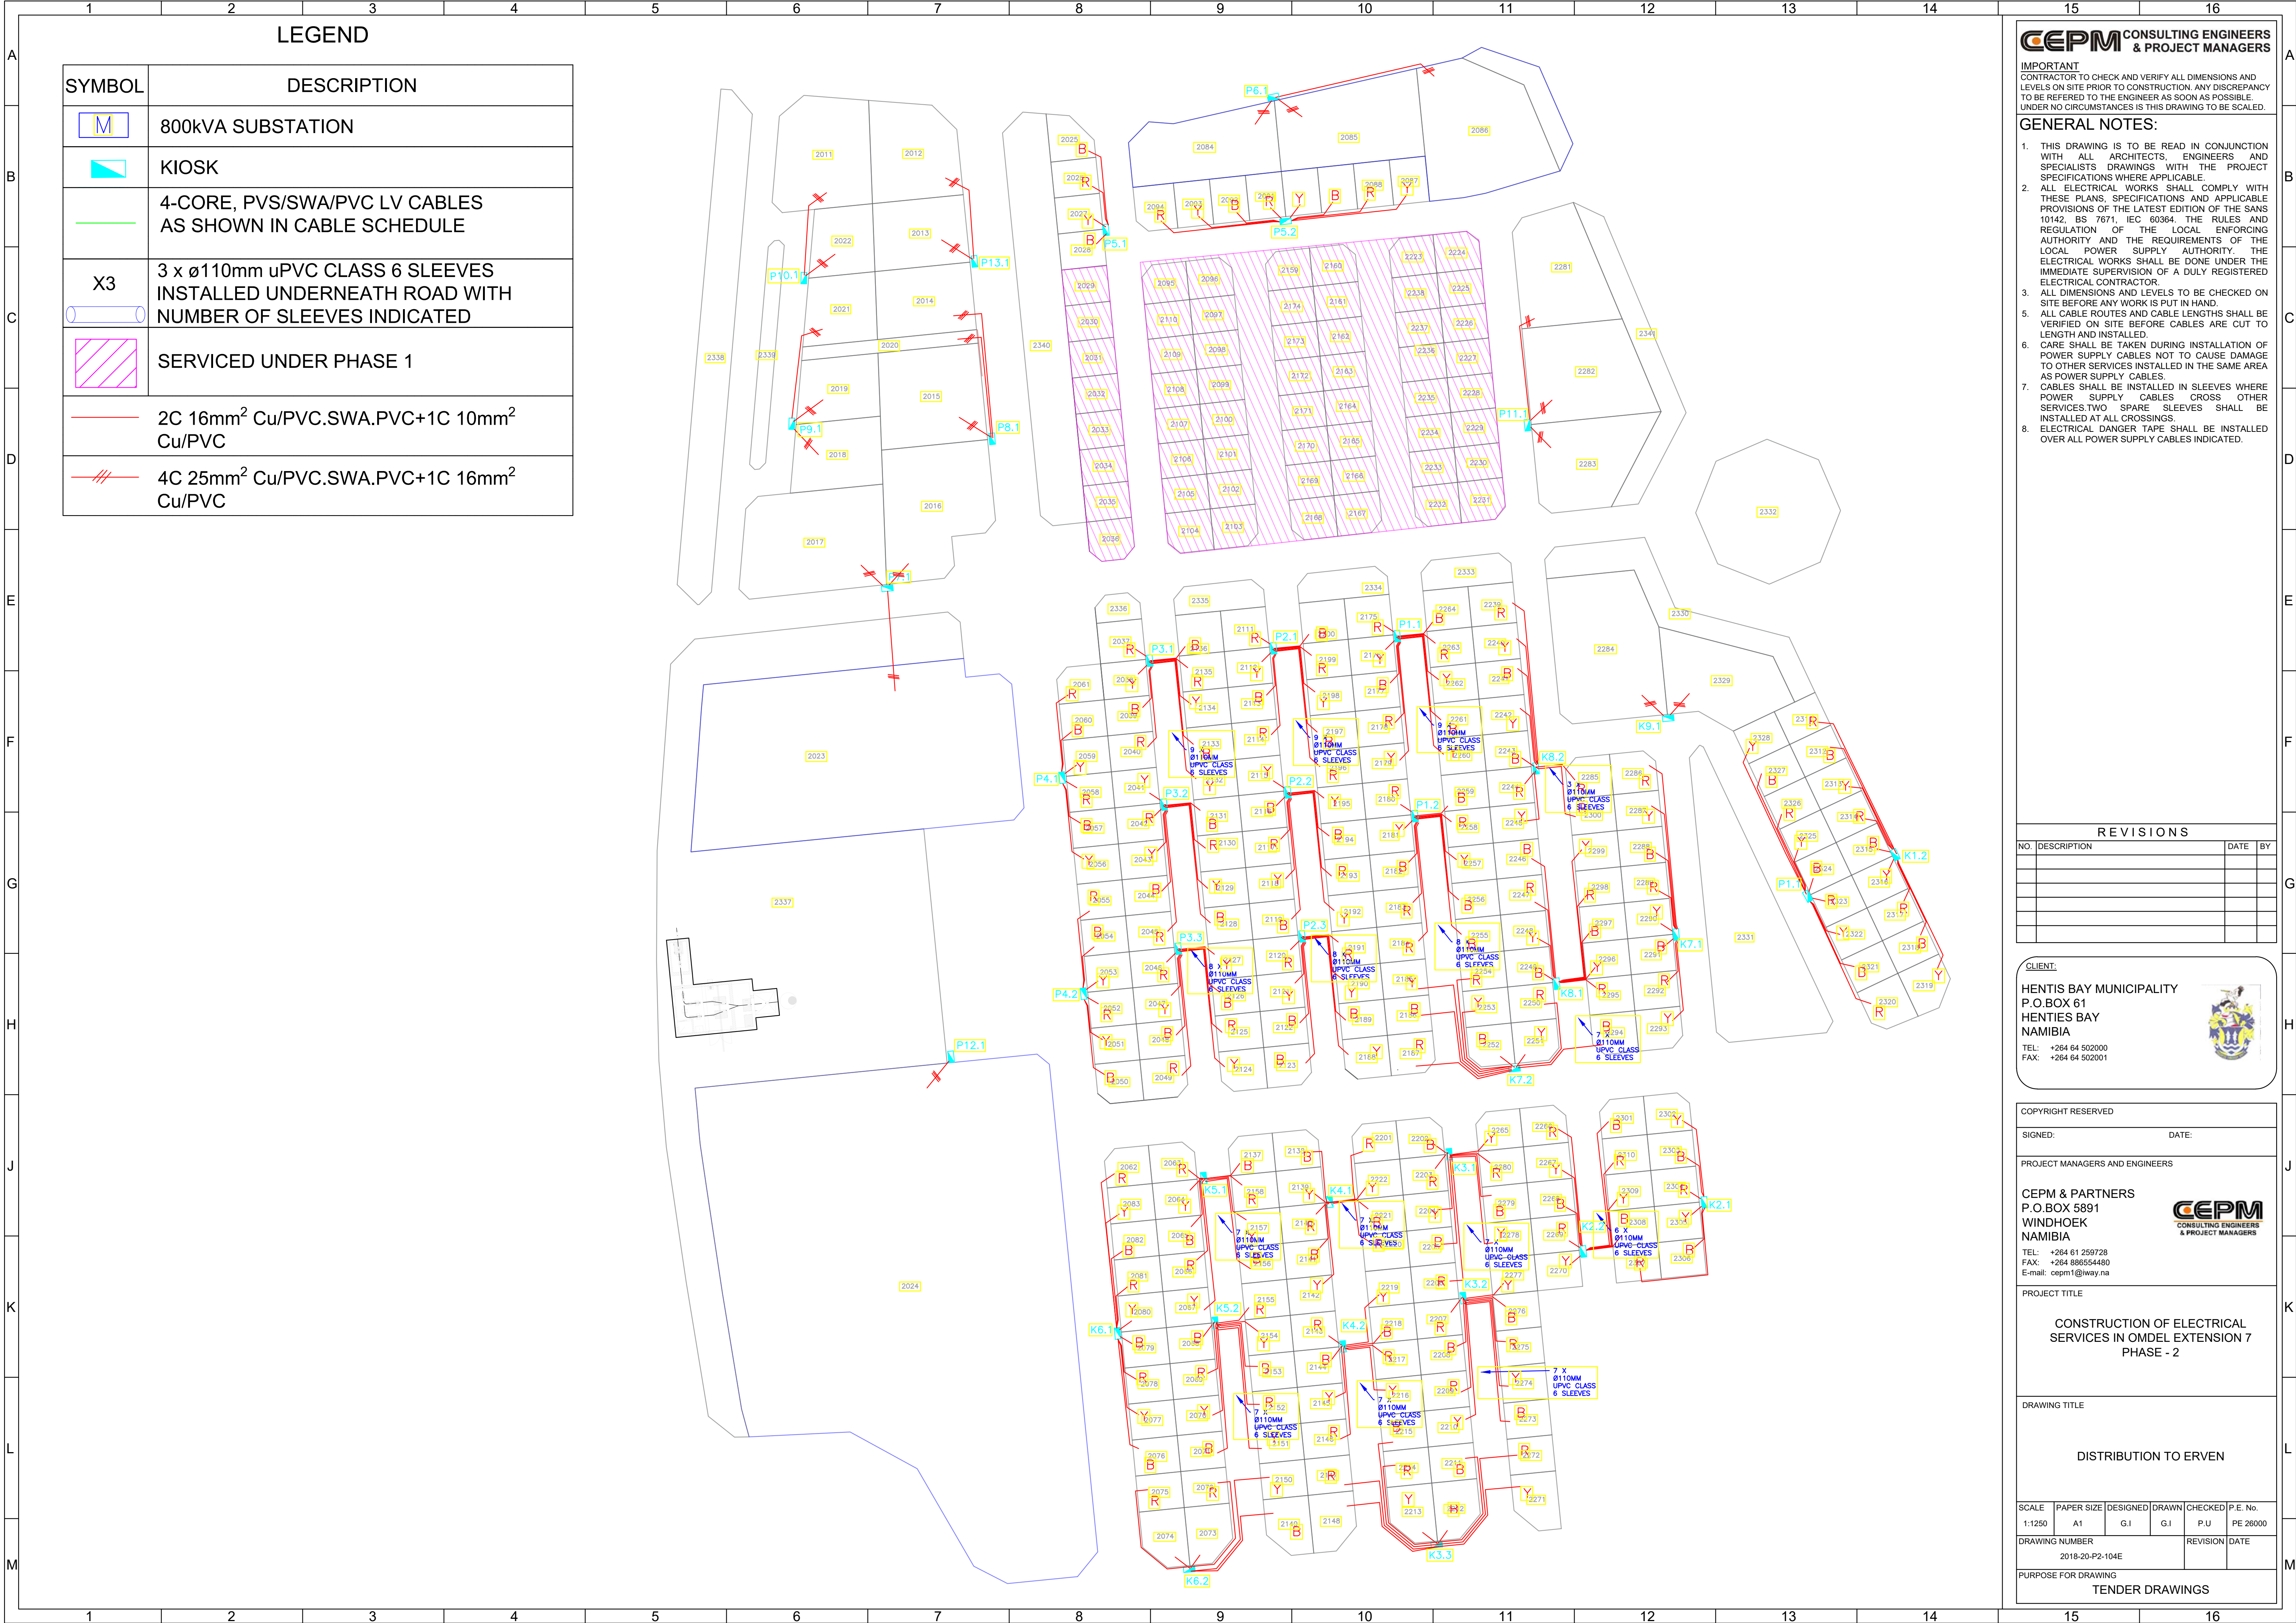

IMPORTANT  
CONTRACTOR TO CHECK AND VERIFY ALL DIMENSIONS AND LEVELS ON SITE PRIOR TO CONSTRUCTION. ANY DISCREPANCY TO BE REFERED TO THE ENGINEER AS SOON AS POSSIBLE UNDER NO CIRCUMSTANCES IS THIS DRAWING TO BE SCALED.

- GENERAL NOTES:
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL ARCHITECTS, ENGINEERS AND SPECIALISTS DRAWINGS WITH THE PROJECT SPECIFICATIONS WHERE APPLICABLE.
  - ALL ELECTRICAL WORKS SHALL COMPLY WITH THESE PLANS, SPECIFICATIONS AND APPLICABLE PROVISIONS OF THE LATEST EDITION OF THE SANS 10142, BS 7671, IEC 60364. THE RULES AND REGULATION OF THE LOCAL ENFORCING AUTHORITY AND THE REQUIREMENTS OF THE LOCAL POWER SUPPLY AUTHORITY. THE ELECTRICAL WORKS SHALL BE DONE UNDER THE IMMEDIATE SUPERVISION OF A DULY REGISTERED ELECTRICAL CONTRACTOR.
  - ALL DIMENSIONS AND LEVELS TO BE CHECKED ON SITE BEFORE ANY WORK IS PUT IN HAND.
  - ALL CABLE ROUTES AND CABLE LENGTHS SHALL BE VERIFIED ON SITE BEFORE CABLES ARE CUT TO LENGTH AND INSTALLED.
  - CARE SHALL BE TAKEN DURING INSTALLATION OF POWER SUPPLY CABLES NOT TO CAUSE DAMAGE TO OTHER SERVICES INSTALLED IN THE SAME AREA AS POWER SUPPLY CABLES.
  - CABLES SHALL BE INSTALLED IN SLEEVES WHERE POWER SUPPLY CABLES CROSS OTHER SERVICES. TWO SPARE SLEEVES SHALL BE INSTALLED AT ALL CROSSINGS.
  - ELECTRICAL DANGER TAPE SHALL BE INSTALLED OVER ALL POWER SUPPLY CABLES INDICATED.

| REVISIONS |             |      |    |
|-----------|-------------|------|----|
| NO.       | DESCRIPTION | DATE | BY |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |
|           |             |      |    |

CLIENT:  
HENTIS BAY MUNICIPALITY  
P.O.BOX 61  
HENTIES BAY  
NAMIBIA  
TEL: +264 64 502000  
FAX: +264 64 502001

COPYRIGHT RESERVED  
SIGNED: DATE:  
PROJECT MANAGERS AND ENGINEERS  
CEPM & PARTNERS  
P.O.BOX 5891  
WINDHOEK  
NAMIBIA  
TEL: +264 61 259728  
FAX: +264 886554480  
E-mail: cepm1@iway.na

PROJECT TITLE  
CONSTRUCTION OF ELECTRICAL SERVICES IN OMDEL EXTENSION 7  
PHASE - 2

DRAWING TITLE  
DISTRIBUTION TO ERVEN

| SCALE               | PAPER SIZE | DESIGNED | DRAWN | CHECKED  | P.E. No. |
|---------------------|------------|----------|-------|----------|----------|
| 1:1250              | A1         | G.I      | G.I   | P.U      | PE 26000 |
| DRAWING NUMBER      |            |          |       | REVISION | DATE     |
| 2018-20-P2-104E     |            |          |       |          |          |
| PURPOSE FOR DRAWING |            |          |       |          |          |
| TENDER DRAWINGS     |            |          |       |          |          |